

lammina

8 AL

SUPERLIGHT

Aluminum Tenders



S P E C S	Overall Length	: 8'5" / 2.56m	Number of Chambers	: 3	Maximum HP	: 6hp / 4.5kw
	Overall Beam	: 4'9" / 1.45m	Person Capacity	: 4	Shaft Length	: 15" / 38.1cm
	Inside Length	: 5'10" / 1.79m	Weight	: 73lb / 33kg	RDC Design Category : C	
	Inside Beam	: 2' / 0.62m	Weight with Bow Locker	: 80lb/36kg		
	Tube Diameter	: 16" / 0.41m	Recommended HP	: 4hp / 3.0kw		

S T A N D A R D F E A T U R E S	<ul style="list-style-type: none"><li>■ Deep "V" Marine Grade Aluminum Hull</li><li>■ Heavy Duty Transom Knee</li><li>■ Non - Skid Rubber Floor Panels</li><li>■ Plastic External Transom Plate</li><li>■ Aluminum Internal Transom Plate with Security Lip</li><li>■ Aluminum Bow Eye</li><li>■ 3 Aluminum Davit Lifting Points</li><li>■ Deck Drain with Plug</li></ul>	<ul style="list-style-type: none"><li>■ Orca(CSM) Five Layer Coated Fabric</li><li>■ Push Push Plastic Non-Corrosive 2 Stage Inflation Valves</li><li>■ Raised Single Rub Rail</li><li>■ 1 Front &amp; 2 Side Orca(CSM) Fabric Handles on Tubes</li><li>■ 2 Inside Bow Single Orca(CSM) Fabric Handles on Tubes</li><li>■ 2 Inside Stern Single Orca (CSM) Fabric Handles on Tubes</li><li>■ Removable Rowing Seat</li><li>■ Oarlock Bases</li></ul>	<ul style="list-style-type: none"><li>■ Telescopic Oars with Aluminum Shaft</li><li>■ Paddle Holders</li><li>■ Hand Pump</li><li>■ Maintenance Kit</li><li>■ Owner's Manual</li><li>■ 3 Layer Reinforced Seams</li><li>■ Rubber Protector on Full Length of Keel</li></ul>

O P T I O N A L F E A T U R E S	<ul style="list-style-type: none"><li>■ Bow Locker Storage with Vent to Fit a 3 Gal Portable Fuel Tank</li><li>■ Tube Chaps</li><li>■ Boat Cover</li></ul>	<ul style="list-style-type: none"><li>■ Lateral Fold Down Stainless Steel Cleat</li><li>■ Chock Set</li><li>■ Bow Step with Fold Down Stainless Steel cleat</li></ul>





lammina

9 AL    SUPERLIGHT

Aluminum Tenders



S P E C S	Overall Length	: 9'1" / 2.76m	Number of Chambers	: 3	Maximum HP	: 10hp / 7.5kw
	Overall Beam	: 4'9" / 1.45m	Person Capacity	: 4	Shaft Length	: 15" / 38.1cm
	Inside Length	: 6'3" / 1.90m	Weight	: 79lb / 36kg	RDC Design Category : C	
	Inside Beam	: 2'2" / 0.66m	Weight with Bow Locker	: 86lb/39kg		
	Tube Diameter	: 16" / 0.41m	Recommended HP	: 8hp / 6.0kw		

S T A N D A R D F E A T U R E S	<ul style="list-style-type: none"><li>■ Deep "V" Marine Grade Aluminum Hull</li><li>■ Heavy Duty Transom Knee</li><li>■ Non - Skid Rubber Floor Panels</li><li>■ Plastic External Transom Plate</li><li>■ Aluminum Internal Transom Plate with Security Lip</li><li>■ Aluminum Bow Eye</li><li>■ 3-4 Aluminum Davit Lifting Points</li><li>■ Deck Drain with Plug</li></ul>			<ul style="list-style-type: none"><li>■ Orca(CSM) Five Layer Coated Fabric</li><li>■ Push Push Plastic Non-Corrosive 2 Stage Inflation Valves</li><li>■ Raised Single Rub Rail</li><li>■ 1 Front &amp; 2 Side Orca(CSM) Fabric Handles on Tubes</li><li>■ 2 Inside Bow Sets of Double Orca(CSM) Fabric Handles on Tubes</li><li>■ 2 Inside Stern Single Orca (CSM) Fabric Handles on Tubes</li><li>■ Removable Rowing Seat</li><li>■ Oarlock Bases</li></ul>		
				<ul style="list-style-type: none"><li>■ Telescopic Oars with Aluminum Shaft</li><li>■ Paddle Holders</li><li>■ Hand Pump</li><li>■ Maintenance Kit</li><li>■ Owner's Manual</li><li>■ 3 Layer Reinforced Seams</li><li>■ Rubber Protector on Full Length of Keel</li></ul>		

O P T I O N A L F E A T U R E S	<ul style="list-style-type: none"><li>■ Bow Locker Storage with Vent to Fit a 3 Gal Portable Fuel Tank</li><li>■ Tube Chaps</li><li>■ Boat Cover</li></ul>			<ul style="list-style-type: none"><li>■ Chock Set</li><li>■ Bow Step with Fold Down Stainless Steel cleat</li><li>■ Lateral Fold Down Stainless Steel Cleat</li></ul>		





lammina

9.5AL SUPERLIGHT

Aluminum Tenders



S P E C S	Overall Length	: 9'6"/ 2.90m	Number of Chambers	: 3	Maximum HP	: 15hp / 11.2kw
	Overall Beam	: 5'6"/ 1.68m	Person Capacity	: 5	Shaft Length	: 15" / 38.1cm
	Inside Length	: 6'11"/ 2.11m	Weight	: 95lb / 43kg	RDC Design Category : C	
	Inside Beam	: 2'6"/ 0.76m	Weight with Bow Locker	: 108lb/49kg		
	Tube Diameter	: 17"/ 0.43m	Recommended HP	: 8hp / 6.0kw		

STANDARDS  
FEATURES

- Deep "V" Marine Grade Aluminum Hull
- Stringer System Welded Under Aluminum Deck
- Heavy Duty Transom Knee
- Non - Skid Rubber Floor Panels
- Plastic External Transom Plate
- Aluminum Internal Transom Plate with Security Lip
- Aluminum Bow Eye
- 3-4 Aluminum Davit Lifting Points
- Aluminum Transom Tie Down & Towing Rings

- Deck Drain with Plug
- Orca(CSM) Five Layer Coated Fabric
- Raised Single Rub Rail
- Push Push Plastic Non-Corrosive 2 Stage Inflation Valves
- 1 Front & 2 Side Orca(CSM) Fabric Handles on Tubes
- 2 Inside Bow Sets of Double Orca(CSM) Fabric Handles on Tubes
- 2 Inside Stern Single Orca (CSM) Fabric Handles on Tubes
- Removable Rowing Seat

- Oarlock Bases
- Telescopic Oars with Aluminum Shaft
- Paddle Holders
- Hand Pump
- Maintenance Kit
- Owner's Manual
- 3 Layer Reinforced Seams
- Rubber Protector on Full Length of Keel

OPTIONAL  
FEATURES

- Bow Locker Storage with Vent to Fit a 6 Gal Portable Fuel Tank
- Portable 6 Gal Fuel Tank Installed in Bow Locker with Fittings
- Tube Chaps
- Boat Cover
- Chock Set

- Bow Step with Fold Down Stainless Steel Cleat
- Lateral Fold Down Stainless Steel Cleat



lammina

10AL SUPERLIGHT

Aluminum Tenders



S P E C S	Overall Length	: 10'6"/ 3.19m	Number of Chambers	: 3	Maximum HP	: 20hp / 14.9kw
	Overall Beam	: 5'6"/ 1.68m	Person Capacity	: 5	Shaft Length	: 15" / 38.1cm
	Inside Length	: 7'6"/ 2.30m	Weight	: 117lb / 53kg	RDC Design Category	: C
	Inside Beam	: 2'8"/ 0.81m	Weight with Bow Locker	: 130lb/59kg		
	Tube Diameter	: 17"/ 0.43m	Recommended HP	: 10hp / 7.5kw		

S T A N D A R D S F E A T U R E S	<ul style="list-style-type: none"><li>■ Deep "V" Marine Grade Aluminum Hull</li><li>■ Stringer System Welded Under Aluminum Deck</li><li>■ Heavy Duty Transom Knee</li><li>■ Non - Skid Rubber Floor Panels</li><li>■ Plastic External Transom Plate</li><li>■ Aluminum Internal Transom Plate with Security Lip</li><li>■ Aluminum Bow Eye</li><li>■ 3-4 Aluminum Davit Lifting Points</li><li>■ Aluminum Transom Tie Down &amp; Towing Rings</li></ul>	<ul style="list-style-type: none"><li>■ Deck Drain with Plug</li><li>■ Orca(CSM) Five Layer Coated Fabric</li><li>■ Raised Single Rub Rail</li><li>■ Push Push Plastic Non-Corrosive 2 Stage Inflation Valves</li><li>■ 1 Front &amp; 2 Side Orca(CSM) Fabric Handles on Tubes</li><li>■ 2 Inside Bow Sets of Double Orca(CSM) Fabric Handles on Tubes</li><li>■ 2 Inside Stern Double Orca (CSM) Fabric Handles on Tubes</li><li>■ Removable Rowing Seat</li></ul>	<ul style="list-style-type: none"><li>■ Oarlock Bases</li><li>■ Telescopic Oars with Aluminum Shaft</li><li>■ Paddle Holders</li><li>■ Hand Pump</li><li>■ Maintenance Kit</li><li>■ Owner's Manual</li><li>■ 3 Layer Reinforced Seams</li><li>■ Rubber Protector on Full Length of Keel</li></ul>

O P T I O N A L F E A T U R E S	<ul style="list-style-type: none"><li>■ Bow Locker Storage with Vent to Fit a 6 Gal Portable Fuel Tank</li><li>■ Portable 6 Gal Fuel Tank Installed in Bow Locker with Fittings</li><li>■ Tube Chaps</li><li>■ Boat Cover</li><li>■ Chock Set</li><li>■ Bow Step with Fold Down Stainless Steel Cleat</li><li>■ Lateral Fold Down Stainless Steel Cleat</li><li>■ Removable Stern Seat</li></ul>	<ul style="list-style-type: none"><li>■ Fiberglass Console</li><li>■ One Person Jockey Seat</li><li>■ Two Person Jockey Seat</li><li>■ Stainless Steel Helm Unit</li><li>■ Bench Seat with Storage</li></ul>



lammina

11AL    SUPERLIGHT

Aluminum Tenders



S P E C S	Overall Length	: 11'6" / 3.50m	Number of Chambers	: 3	Maximum HP	: 30hp / 22.4kw
	Overall Beam	: 5'7" / 1.70m	Person Capacity	: 6	Shaft Length	: 20" / 50.8cm
	Inside Length	: 8'6" / 2.60m	Weight	: 172lb / 78kg	RDC Design Category : C	
	Inside Beam	: 2'8" / 0.81m	Weight with Bow Locker	: 187lb/85kg		
	Tube Diameter	: 17" / 0.43m	Recommended HP	: 20hp / 14.9kw		

S T A N D A R D F E A T U R E S	<ul style="list-style-type: none"><li>■ Deep "V" Marine Grade Aluminum Hull</li><li>■ Stringer System Welded Under Aluminum Deck</li><li>■ Heavy Duty Transom Knee</li><li>■ Non - Skid Rubber Floor Panels</li><li>■ Plastic External Transom Plate</li><li>■ Aluminum Internal Transom Plate</li><li>■ Aluminum Bow Eye</li><li>■ 3-4 Aluminum Davit Lifting Points</li><li>■ Aluminum Transom Tie Down &amp; Towing Rings</li></ul>			<ul style="list-style-type: none"><li>■ Aluminum Bow Tie Down &amp; Towing Rings</li><li>■ Deck Drain with Plug</li><li>■ Orca(CSM) Five Layer Coated Fabric</li><li>■ Raised Single Rub Rail</li><li>■ Push Push Plastic Non-Corrosive 2 Stage Inflation Valves</li><li>■ 1 Front &amp; 2 Side Orca(CSM) Fabric Handles on Tubes</li><li>■ 2 Inside Bow Sets of Double Orca(CSM) Fabric Handles on Tubes</li><li>■ 2 Inside Stern Single Orca (CSM) Fabric Handles on Tube</li></ul>		
				<ul style="list-style-type: none"><li>■ Removable Stern Seat</li><li>■ Paddles with Aluminum Shaft</li><li>■ Paddle Holders</li><li>■ Hand Pump</li><li>■ Maintenance Kit</li><li>■ Owner's Manual</li><li>■ 3 Layer Reinforced Seams</li><li>■ Rubber Protector on Full Length of Keel</li></ul>		

O P T I O N A L F E A T U R E S	<ul style="list-style-type: none"><li>■ Bow Locker Storage with Vent to Fit a 6 Gal Portable Fuel Tank</li><li>■ Portable 6 Gal Fuel Tank Installed in Bow Locker with Fittings</li><li>■ Tube Chaps</li><li>■ Boat Cover</li><li>■ Chock Set</li><li>■ Bow Step with Fold Down Stainless Steel Cleat</li><li>■ Lateral Fold Down Stainless Steel Cleat</li><li>■ Removable Rowing Seat</li><li>■ Fiberglass Console with Forward Seat</li></ul>			<ul style="list-style-type: none"><li>■ Fiberglass Console</li><li>■ Bench Seat with Storage</li><li>■ One Person Jockey Seat</li><li>■ Two Person Jockey Seat</li><li>■ Stainless Steel Helm Unit</li></ul>		



lammina

12AL    SUPERLIGHT

Aluminum Tenders



S P E C S	Overall Length	: 12' / 3.66m	Number of Chambers	: 3	Maximum HP	: 30hp / 22.4kw
	Overall Beam	: 6'1" / 1.85m	Person Capacity	: 6	Shaft Length	: 20" / 50.8cm
	Inside Length	: 8'10" / 2.70m	Weight	: 198lb / 90kg	RDC Design Category : C	
	Inside Beam	: 2'11" / 0.89m	Weight with Bow Locker	: 213lb/97kg		
	Tube Diameter	: 18" / 0.46m	Recommended HP	: 25hp /18.7kw		

S T A N D A R D F E A T U R E S	<ul style="list-style-type: none"><li>■ Deep "V" Marine Grade Aluminum Hull</li><li>■ Stringer System Welded Under Aluminum Deck</li><li>■ Heavy Duty Transom Knee</li><li>■ Non - Skid Rubber Floor Panels</li><li>■ Plastic External Transom Plate</li><li>■ Aluminum Internal Transom Plate</li><li>■ Aluminum Bow Eye</li><li>■ 3-4 Aluminum Davit Lifting Points</li><li>■ Aluminum Transom Tie Down &amp; Towing Rings</li></ul>			<ul style="list-style-type: none"><li>■ Aluminum Bow Tie Down &amp; Towing Rings</li><li>■ Deck Drain with Plug</li><li>■ Orca(CSM) Five Layer Coated Fabric</li><li>■ Raised Double Rub Rail</li><li>■ Push Push Plastic Non-Corrosive 2 Stage Inflation Valves</li><li>■ 1 Front &amp; 2 Side Orca(CSM) Fabric Handles on Tubes</li><li>■ 2 Inside Bow Sets of Double Orca(CSM) Fabric Handles on Tubes</li><li>■ 2 Inside Stern Single Orca (CSM) Fabric Handles on Tubes</li></ul>		
				<ul style="list-style-type: none"><li>■ Removable Stern Seat</li><li>■ Paddles with Aluminum Shaft</li><li>■ Paddle Holders</li><li>■ Hand Pump</li><li>■ Maintenance Kit</li><li>■ Owner's Manual</li><li>■ 3 Layer Reinforced Seams</li><li>■ Rubber Protector on Full Length of Keel</li></ul>		

O P T I O N A L F E A T U R E S	<ul style="list-style-type: none"><li>■ Bow Locker Storage with Vent to Fit a 6 Gal Portable Fuel Tank</li><li>■ Portable 6 Gal Fuel Tank Installed in Bow Locker with Fittings</li><li>■ Tube Chaps</li><li>■ Boat Cover</li><li>■ Chock Set</li><li>■ Bow Step with Fold Down Stainless Steel Cleat</li><li>■ Lateral Fold Down Stainless Steel Cleat</li><li>■ Removable Rowing Seat</li><li>■ Fiberglass Console with Forward Seat</li></ul>			<ul style="list-style-type: none"><li>■ Fiberglass Console</li><li>■ Bench Seat with Storage</li><li>■ One Person Jockey Seat</li><li>■ Two Person Jockey Seat</li><li>■ Stainless Steel Helm Unit</li></ul>		





S P E C S	Overall Length	: 13' / 3.96m	Number of Chambers	: 3	Maximum HP	: 40hp / 29.8kw
	Overall Beam	: 6'7" / 2.00m	Person Capacity	: 7	Shaft Length	: 20" / 50.8cm
	Inside Length	: 9'10" / 3.00m	Weight	: 220lb/100kg	RDC Design Category : C	
	Inside Beam	: 3'3" / 0.99m	Weight with Bow Locker	: 235lb/107kg		
	Tube Diameter	: 18" / 0.46m	Recommended HP	: 30hp / 22.4kw		

S T A N D A R D  F E A T U R E S	<ul style="list-style-type: none"><li>■ Deep "V" Marine Grade Aluminum Hull</li><li>■ Stringer System Welded Under Aluminum Deck</li><li>■ Heavy Duty Transom Knee</li><li>■ Non - Skid Rubber Floor Panels</li><li>■ Plastic External Transom Plate</li><li>■ Aluminum Internal Transom Plate</li><li>■ Aluminum Bow Eye</li><li>■ 3-4 Aluminum Davit Lifting Points</li><li>■ Aluminum Transom Tie Down &amp; Towing Rings</li></ul>			<ul style="list-style-type: none"><li>■ Aluminum Bow Tie Down &amp; Towing Rings</li><li>■ Deck Drain with Plug</li><li>■ Orca(CSM) Five Layer Coated Fabric</li><li>■ Raised Double Rub Rail</li><li>■ Push Push Plastic Non-Corrosive 2 Stage Inflation Valves</li><li>■ 1 Front &amp; 4 Side Orca(CSM) Fabric Handles on Tubes</li><li>■ 2 Inside Bow Sets of Double Orca(CSM) Fabric Handles on Tubes</li><li>■ 2 Inside Stern Double Orca (CSM) Fabric Handles on Tubes</li></ul>		
				<ul style="list-style-type: none"><li>■ Paddles with Aluminum Shaft</li><li>■ Paddle Holders</li><li>■ Hand Pump</li><li>■ Maintenance Kit</li><li>■ Owner's Manual</li><li>■ 3 Layer Reinforced Seams</li><li>■ Rubber Protector on Full Length of Keel</li></ul>		

OPTIONAL  
FEATURES

- Bow Locker Storage with Vent to Fit a 6 Gal Portable Fuel Tank
- Portable 6 Gal Fuel Tank Installed in Bow Locker with Fittings
- Tube Chaps
- Boat Cover
- Chock Set
- Bow Step with Fold Down Stainless Steel Cleat
- Lateral Fold Down Stainless Steel Cleat
- Fiberglass Console
- Fiberglass Console with Forward Seat

- Bench Seat with Storage
- One Person Jockey Seat
- Two Person Jockey Seat
- Stainless Steel Helm Unit

lammina

14AL    SUPERLIGHT

Aluminum Tenders



S P E C S	Overall Length	: 14' / 4.27m	Number of Chambers	: 4	Maximum HP	: 50hp / 37.3kw
	Overall Beam	: 6'7" / 2.00m	Person Capacity	: 8	Shaft Length	: 20" / 50.8cm
	Inside Length	: 10'10" / 3.30m	Weight	: 246lb / 112kg	RDC Design Category : C	
	Inside Beam	: 3'3" / 0.99m	Weight with Bow Locker : 264lb / 120kg			
	Tube Diameter	: 19" / 0.48m	Recommended HP : 40hp / 29.8kw			

STANDARD FEATURES

- Deep "V" Marine Grade Aluminum Hull
- Stringer System Welded Under Aluminum Deck
- Heavy Duty Transom Knee
- Non - Skid Rubber Floor Panels
- Plastic External Transom Plate
- Aluminum Internal Transom Plate
- Aluminum Bow Eye
- 3-4 Aluminum Davit Lifting Points
- Aluminum Transom Tie Down & Towing Rings

- Aluminum Bow Tie Down & Towing Rings
- Deck Drain with Plug
- Orca(CSM) Five Layer Coated Fabric
- Raised Double Rub Rail
- Push Push Plastic Non-Corrosive 2 Stage Inflation Valves
- 1 Front & 4 Side Orca(CSM) Fabric Handles on Tubes
- 2 Inside Bow Sets of Triple Orca(CSM) Fabric Handles on Tubes
- 2 Inside Stern Double Orca (CSM) Fabric Handles on Tubes

- Paddles with Aluminum Shaft
- Paddle Holders
- Hand Pump
- Maintenance Kit
- Owner's Manual
- 3 Layer Reinforced Seams
- Rubber Protector on Full Length of Keel

OPTIONAL  
FEATURES

- Bow Locker Storage with Vent to Fit a 6 Gal Portable Fuel Tank
- Portable 6 Gal Fuel Tank Installed in Bow Locker with Fittings
- Tube Chaps
- Boat Cover
- Chock Set
- Bow Step with Fold Down Stainless Steel Cleat
- Lateral Fold Down Stainless Steel Cleat
- Fiberglass Console
- Fiberglass Console with Forward Seat

- Bench Seat with Storage
- One Person Jockey Seat
- Two Person Jockey Seat
- Stainless Steel Helm Unit



lammina

15ALSUPERLIGHT

Aluminum Tenders



S P E C S	Overall Length	: 15' / 4.57m	Number of Chambers	: 5	Maximum HP	: 60hp / 44.8kw
	Overall Beam	: 6'9" / 2.06m	Person Capacity	: 9	Shaft Length	: 20" / 50.8cm
	Inside Length	: 11'8" / 3.55m	Weight	: 339lb / 154kg	RDC Design Category : C	
	Inside Beam	: 3'4" / 1.03m	Weight with Bow Locker	: 357lb / 162kg		
	Tube Diameter	: 19" / 0.48m	Recommended HP	: 50hp / 37.3kw		

STANDARDS  
FEATURES

- Deep "V" Marine Grade Aluminum Hull
- Stringer System Welded Under Aluminum Deck
- Heavy Duty Transom Knee
- Non - Skid Rubber Floor Panels
- Plastic External Transom Plate
- Aluminum Internal Transom Plate
- Aluminum Bow Eye
- 3-4 Aluminum Davit Lifting Points
- Aluminum Transom Tie Down & Towing Rings

- Aluminum Bow Tie Down & Towing Rings
- Deck Drain with Plug
- Orca(CSM) Five Layer Coated Fabric
- Raised Double Rub Rail
- Push Push Plastic Non-Corrosive 2 Stage Inflation Valves
- 1 Front & 4 Side Orca(CSM) Fabric Handles on Tubes
- 2 Inside Bow Sets of Quadruple Orca(CSM) Fabric Handles on Tubes
- 2 Inside Stern Double Orca (CSM) Fabric Handles on Tubes

- Paddles with Aluminum Shaft
- Paddle Holders
- Hand Pump
- Maintenance Kit
- Owner's Manual
- 3 Layer Reinforced Seams
- Rubber Protector on Full Length of Keel

OPTIONAL  
FEATURES

- Bow Locker Storage with Vent to Fit a 6 Gal Portable Fuel Tank
- Portable 6 Gal Fuel Tank Installed in Bow Locker with Fittings
- Tube Chaps
- Boat Cover
- Chock Set
- Bow Step with Fold Down Stainless Steel Cleat
- Lateral Fold Down Stainless Steel Cleat
- Fiberglass Console
- Fiberglass Console with Forward Seat

- Bench Seat with Storage
- One Person Jockey Seat
- Two Person Jockey Seat
- Stainless Steel Helm Unit






lammina

16ALSUPERLIGHT

Aluminum Tenders

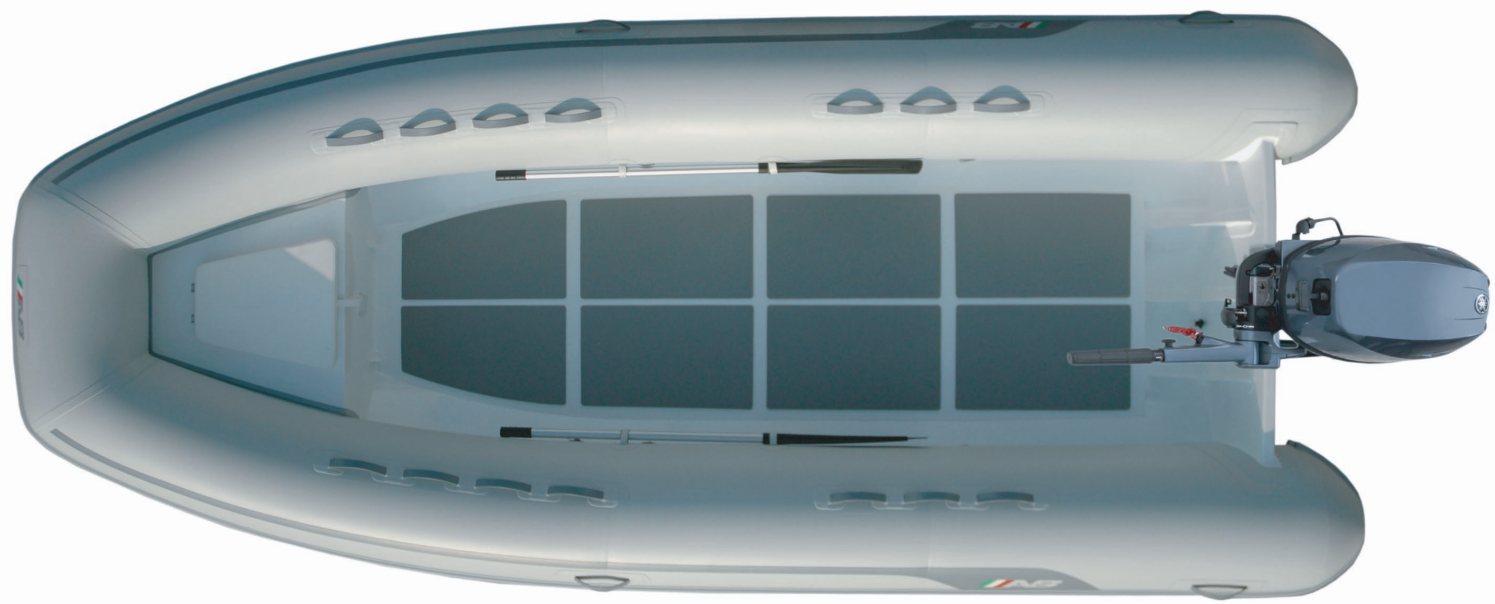

S P E C S	Overall Length	: 16' / 4.88m	Number of Chambers	: 5	Maximum HP	: 60hp / 44.8kw
	Overall Beam	: 7' / 2.14m	Person Capacity	: 10	Shaft Length	: 20" / 50.8cm
	Inside Length	: 12'8" / 3.85m	Weight	: 370lb / 168kg	RDC Design Category : C	
	Inside Beam	: 3'6" / 1.08m	Weight with Bow Locker	: 390lb / 177kg		
	Tube Diameter	: 20" / 0.51m	Recommended HP	: 50hp / 37.3kw		

S T A N D A R D F E A T U R E S	<ul style="list-style-type: none"><li>■ Deep "V" Marine Grade Aluminum Hull</li><li>■ Stringer System Welded Under Aluminum Deck</li><li>■ Heavy Duty Transom Knee</li><li>■ Non - Skid Rubber Floor Panels</li><li>■ Plastic External Transom Plate</li><li>■ Aluminum Internal Transom Plate</li><li>■ Aluminum Bow Eye</li><li>■ 3-4 Aluminum Davit Lifting Points</li><li>■ Aluminum Transom Tie Down &amp; Towing Rings</li></ul>			<ul style="list-style-type: none"><li>■ Aluminum Bow Tie Down &amp; Towing Rings</li><li>■ Deck Drain with Plug</li><li>■ Orca(CSM) Five Layer Coated Fabric</li><li>■ Raised Double Rub Rail</li><li>■ Push Push Plastic Non-Corrosive 2 Stage Inflation Valves</li><li>■ 1 Front &amp; 4 Side Orca(CSM) Fabric Handles on Tubes</li><li>■ 2 Inside Bow Sets of Quadruple Orca(CSM) Fabric Handles on Tubes</li><li>■ 2 Inside Stern Sets of Triple Orca (CSM) Fabric Handles on Tubes</li></ul>		
				<ul style="list-style-type: none"><li>■ Paddles with Aluminum Shaft</li><li>■ Paddle Holders</li><li>■ Hand Pump</li><li>■ Maintenance Kit</li><li>■ Owner's Manual</li><li>■ 3 Layer Reinforced Seams</li><li>■ Rubber Protector on Full Length of Keel</li></ul>		

O P T I O N A L F E A T U R E S	<ul style="list-style-type: none"><li>■ Bow Locker Storage with Vent to Fit a 6 Gal Portable Fuel Tank</li><li>■ Portable 6 Gal Fuel Tank Installed in Bow Locker with Fittings</li><li>■ Tube Chaps</li><li>■ Boat Cover</li><li>■ Chock Set</li><li>■ Bow Step with Fold Down Stainless Steel Cleat</li><li>■ Lateral Fold Down Stainless Steel Cleat</li><li>■ Fiberglass Console</li><li>■ Fiberglass Console with Forward Seat</li></ul>			<ul style="list-style-type: none"><li>■ Bench Seat with Storage</li><li>■ One Person Jockey Seat</li><li>■ Two Person Jockey Seat</li><li>■ Stainless Steel Helm Unit</li><li>■ Bow Locker/ Seat with Vent</li></ul>		

