8VS

Open FiberglassTenders



Overal Length Overal Beam

: 8'6"/ 2.60m

Number of Chambers : 3+1 Shaft Length : 15" / 38.1cm

: 5'4"/ 1.64m

Person Capacity

RDC Design Category : C

Inside Length

: 5′10″/ 1.79m

Weight

: 125lb / 57kg

Inside Beam

: 2'4"/ 0.72m

Recommended HP

: 8hp / 6.0kw

Tube Diameter

: 16"/ 0.41m

Maximum HP : 10hp / 7.5kw

A A \vdash \sqcup SН

0 н

ے

S

- Hand Laid Fiberglass Deep "V" Hull
 Stringer System Laminated into Hu
- Stringer System Laminated into Hull Bow Locker/ Seat
- Diamond Shape Non Skid Deck
- Plastic External Transom Plate

- Aluminum Internal Transom Plate with Security Lip
 Orca (CSM) Five Layer Coated Fabric
 3 Push Push Plastic Non-Corrosive 2 Stage Inflation Valves
- Raised Double Rub Rail Stainless Steel Bow Eye

- 4 Stainless Steel Davit Lifting Points
 Stainless Steel Towing Rings & Tie Downs
 Deck Condensation Plug

- Deck Condensation Plug

 Deck Drain with Plug

 1 Front & 2 Side Orca (CSM) Fabric Handles on Tubes

 2 Inside Bow Sets of 2 Orca (CSM) Fabric Handles on Tubes

 2 Inside Stern Single Orca (CSM) Fabric Handles on Tubes

 3 Layer Reinforced Seams

 Oarlock Bases

- Telescopic Oars with Aluminum Shaft Paddle Holders Removable Rowing Seat

- Bow Hatch Cushion
- **Tube Chaps**
- Boat Cover
- Chock Set

- Bow Step with Fold Down Stainless Steel Cleat
- Lateral Fold Down Stainless Steel Cleat



9VS

Open FiberglassTenders





Overal Length	:	9′6″/ 2.90m	Number of Chambers	:	3 + 1	Shaft Length	: 15" / 38.1cm
Overal Beam	:	5′7″/ 1.72m	Person Capacity	:	4	RDC Design Category	: C
Inside Length	:	6′9″/ 2.06m	Weight	:	152lb / 69kg		
Inside Beam	:	2′8″/ 0.81m	Recommended HP	:	9.9hp / 7.4kw		
Tube Diameter	:	17"/ 0.43m	Maximum HP	:	15hp / 11.2kw		

~ ш A A \forall μш

SH

 \sim \propto

 $\vdash \forall$ д ш ОШ

- Hand Laid Fiberglass Deep "V" HullStringer System Laminated. Stringer System Laminated into Hull Bow Locker/ Seat with Vent
- Bow Locker Storage to Fit a 6 Gal Portable Fuel Tank Diamond Shape Non Skid Deck
- Plastic External Transom Plate
- Aluminum Internal Transom Plate with Security Lip
- Orca (CSM) Five Layer Coated Fabric

 3 Push Push Plastic Non-Corrosive 2 Stage Inflation Valves
 Raised Single Solid Rub Rail
 Stainless Steel Bow Eye

- 4 Stainless Steel Davit Lifting Points
 Stainless Steel Towing Rings & Tie Downs
 Deck Condensation Plug
- Deck Drain with Plug
- 1 Front & 2 Side Orca (CSM) Fabric Handles on Tubes Maintenance Kit
 2 Inside Bow Sets of 2 Orca (CSM) Fabric Handles on Tubes Owner's Manual
 2 Inside Stern 1 Orca (CSM) Fabric Handles on Tubes Additional Air Ret
- 3 Layer Reinforced Seams Oarlock Bases

- Telescopic Oars with Aluminum Shaft
 Paddle Holders
 Removable Rowing Seat

- Additional Air Retaining Chamber Under the Floor Hidden Channel for Fuel Fittings with SS Starburst


- Portable 6 gal Fuel Tank Installed in Bow Locker with Fittings
- Bow Hatch Cushion
- Tube Chaps
- Boat Cover
- Chock Set

- Bow Step with Fold Down Stainless Steel Cleat
- Lateral Fold Down Stainless Steel Cleat
- Removable Stern Seat
- Bimini Top



10VS

Open FiberglassTenders

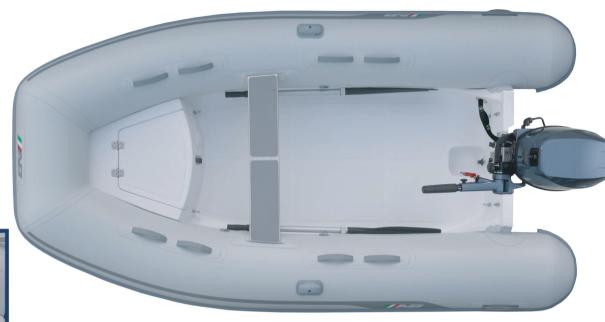

: 25hp / 18.7kw



Overal Length	: 10′6″/ 3.19m	Number of Chambers	: 3+1	Shaft Length	: 15"/38.1cm
Overal Beam	: 5′7″/ 1.72m	Person Capacity	: 5	RDC Design Category	· : C
Inside Length	: 7′7″/ 2.31m	Weight	: 169lb / 77kg		
Inside Beam	: 2′8″/ 0.81m	Recommended HP	: 15hp / 11.2kw		

2 жш A R ∢ ∢ \vdash \sqcup

SH

ΨЫ

 \simeq

 \circ

- ∢

шЪ

Ош

ച S

- Hand Laid Fiberglass Deep "V" Hull
- Stringer System Laminated into Hull Bow Locker/ Seat with Vent

Tube Diameter

- Bow Locker Storage to Fit a 6 Gal Portable Fuel Tank. Diamond Shape Non Skid Deck

- Stainless Steel Bow Eye

- 4 Stainless Steel Davit Lifting Points

Maximum HP

- Stainless Steel Towing Rings & Tie Downs
 Deck Condensation Plug
 Deck Drain with Plug
 1 Front & 2 Side Orca (CSM) Fabric Handles on Tubes
- Plastic External Transom Plate
 Plastic External Transom Plate with Security Lip
 Orca (CSM) Five Layer Coated Fabric
 3 Push Push Plastic Non-Corrosive 2 Stage Inflation Valves
 Strickers Street Brus Eve

- Telescopic Oars with Aluminum Shaft
 Paddle Holders
 Removable Rowing Seat

- Hand Pump
- Maintenance Kit
- Additional Air Retaining Chamber Under the Floor Hidden Channel for Fuel Fittings with SS Starburst

Portable 6 gal Fuel Tank Installed in Bow Locker with Fittings

: 17"/ 0.43m

- Bow Hatch Cushion
- Tube Chaps
- Boat Cover
- Chock Set
- Bow Step with Fold Down Stainless Steel Cleat
- Lateral Fold Down Stainless Steel Cleat

- Removable Stern Seat
- Bimini Top
- Fiberglass Console
- Bench Seat with Storage
- Two person Jockey Seat
- Stainless Steel Helm Unit



12VS

Open FiberglassTenders



ے 2 **Overal Length** : 12′/3.66m Number of Chambers : 3 + 1Shaft Length Option 1: 15"/38.1cm Shaft Length Option 2:20"/50.8cm **Overal Beam Person Capacity** : 6 6′/ 1.82m RDC Design Category: C Inside Length : 8'9"/ 2.67m Weight : 202lb / 92kg Recommended HP Inside Beam : 2'9"/ 0.84m : 20hp / 14.9kw **Tube Diameter** Maximum HP : 18"/ 0.46m : 30hp / 22.4kw

2 A A ⋖⋖ \vdash \sqcup

SH

 \vdash \forall

Δш

Ош

- Hand Laid Fiberglass Deep "V" Hull
- Stringer System Laminated into Hull Bow Locker/ Seat with Vent
- Bow Locker Storage to Fit a 6 Gal Portable Fuel Tank (Only for 15" Shaft Version)
- Diamond Shape Non Skid Deck
- Plastic External Transom Plate
 Aluminum Internal Transom Plate with Security Lip
- Orca (CSM) Five Layer Coated Fabric

 3 Push Push Plastic Non-Corrosive 2 Stage Inflation Valves
- Raised Single Solid Rub Rail

- Stainless Steal Bow Eye 4 Stainless Steal Davit Lifting Points Stainless Steal Towing Rings & Tie Downs Deck Condensation Plug

- Deck Orain with Plug

 1 Front & 2 Side Orca (CSM) Fabric Handles on Tubes

 2 Inside Bow Sets of 2 Orca (CSM) Fabric Handles on Tubes

 2 Inside Stern Single Orca (CSM) Fabric Handles on Tubes

 4 Maintenance Nt

 Owner's Manual

 Additional Air Retaining Chamber Under the Floor

 Hidden Channel for Fuel Fittings with SS Starburst

 Hidden Channel for Fuel Fittings with SS Starburst
- 3 Layer Reinforced Seams Paddle with Aluminum Shaft

- Paddle Holders
- Removable Stern Seat Hand Pump
- Maintenance Kit

- Portable 6 gal Fuel Tank Installed in Bow Locker with
- Fittings (Only for 15" Shaft Version) **Bow Hatch Cushion**
- Tube Chaps
- **Boat Cover**
- **Chock Set**
- Bow Step with Fold Down Stainless Steal Cleat
- Lateral Fold Down Stainless Steal Cleat

- Removable Rowing Seat
- Bimini Top
- Fiberglass Console
- Fiberglass Console with Forward Seat
- Bench Seat with Storage
- Two person Jockey Seat
- Stainless Steal Helm Unit



13VS

Open FiberglassTenders



Inside Length

Overal Length

: 13′/ 3.96m

Number of Chambers : 3 + 1

Shaft Length

: 20" / 50.8cm

Overal Beam : 6'4"/ 1.94m

: 7 **Person Capacity**

RDC Design Category : C

: 9'9"/ 2.97m

Weight

: 293lb / 133kg

Inside Beam : 3'1"/ 0.94m Recommended HP : 30hp / 22.4kw

Tube Diameter : 18"/ 0.46m Maximum HP : 40hp / 29.8kw

2 A R ∢ ∢ \vdash \sqcup

SH

⋖

Ош

ے

S

- Hand Laid Fiberglass Deep "V" Hull
 Stringer System Laminated into Hul
 Bow Locker/ Seat
 Diamond Shape Non Skid Dock Stringer System Laminated into Hull Bow Locker/ Seat Diamond Shape Non - Skid Deck

- Plastic External Transom Plate
- Aluminum Internal Transom Plate
- Orca (CSM) Five Layer Coated Fabric

 3 Push Push Plastic Non-Corrosive 2 Stage Inflation Valves
- Raised Double Rub Rail
- Stainless Steel Bow Eye

- 4 Stainless Steel Davit Lifting Points
- Stainless Steel Towing Rings & Tie Downs Deck Condensation Plug

- Deck Drain with Plug
 1 Front & 4 Side Orca (CSM) Fabric Handles on Tubes
 2 Inside Bow Sets of 2 Orca (CSM) Fabric Handles on Tubes
 2 Inside Stern Double Orca (CSM) Fabric Handles on Tubes
- 3 Layer Reinforced Seams
- Paddle with Aluminum Shaft Paddle Holders

- Removable Stern Seat Hand Pump
- Maintenance Kit Owner's Manual
- Additional Air Retaining Chamber Under the Floor

- Bow Hatch Cushion
- Boat Cover
- Bow Step with Fold Down Stainless Steel Cleat
- Lateral Fold Down Stainless Steel Cleat
- Removable Rowing Seat

- Bimini Top
- Fiberglass Console
- Fiberglass Console with Forward Seat
- Bench Seat with Storage
- Two person Jockey Seat
- Stainless Steel Helm Unit



14VS

Open FiberglassTenders



ட

S

2 ∢∢ \vdash \sqcup SП

⋖ 0 ч

- RDC Design Category : C **Overal Beam Person Capacity** : 8 : 6'4"/ 1.94m Inside Length : 10′10″/3.30m Weight : 348lb / 158kg Recommended HP Inside Beam : 3'1"/ 0.94m : 40hp / 29.8kw **Tube Diameter** Maximum HP : 19"/ 0.48m : 50hp / 37.3kw
 - Hand Laid Fiberglass Deep "V" HullStringer System Laminated into Hu
 - Stringer System Laminated into Hull Bow Locker/ Seat

 - Diamond Shape Non Skid Deck
 - Plastic External Transom Plate

 - Aluminum Internal Transom Plate
 Orca (CSM) Five Layer Coated Fabric
 4 Push Plastic Non-Corrosive 2 Stage Inflation Valves
 - Raised Double Rub Rail
 - Stainless Steel Bow Eye

- 4 Stainless Steel Davit Lifting Points
- Stainless Steel Towing Rings & Tie Downs Deck Condensation Plug

- Deck Condensation Plug
 Deck Drain with Plug
 1 Front & 4 Side Orca (CSM) Fabric Handles on Tubes
 2 Inside Bow Sets of 3 Orca (CSM) Fabric Handles on Tubes
 2 Inside Stern Double Orca (CSM) Fabric Handles on Tubes
- 3 Layer Reinforced Seams
- Paddle with Aluminum Shaft
- Paddle Holders

- Removable Stern SeatHand Pump
- Maintenance Kit Owner's Manual
 - Additional Air Retaining Chamber Under the Floor

- Bow Hatch Cushion
- Boat Cover
- Bow Step with Fold Down Stainless Steel Cleat
- Lateral Fold Down Stainless Steel Cleat
- Removable Rowing Seat

- Bimini Top
- Fiberglass Console
- Fiberglass Console with Forward Seat
- Bench Seat with Storage
- Two person Jockey Seat
- Stainless Steel Helm Unit



15VS

Open FiberglassTenders



Overal Length : 15'/4.57m Number of Chambers : 5 Shaft Length **Person Capacity** RDC Design Category : C **Overal Beam** : 11 : 6'6"/1.99m Inside Length : 11'6"/3.50m Weight : 484lb / 220kg Recommended HP Inside Beam : 3'2"/ 0.97m : 60hp / 44.8kw

Maximum HP

2 A A ⋖⋖ \vdash \sqcup

SH

 \sim

∙ ∢

Ош

S

ட

2

- Hand Laid Fiberglass Deep "V" Hull
- Stringer System Laminated into Hull Bow Locker/ Seat

Tube Diameter

- Diamond Shape Non Skid Deck
- Plastic External Transom Plate
- Aluminum Internal Transom Plate
 Orca (CSM) Five Layer Coated Fabric
 4 Push Plastic Non-Corrosive 2 Stage Inflation Valves

: 19"/ 0.48m

- Raised Double Solid Rub Rail Stainless Steel Bow Eye

- 4 Stainless Steel Davit Lifting Points

- Stainless Steel Towing Rings & Tie Downs 2 Deck Drains with Plug 1 Front & 4 Side Orca (CSM) Fabric Handles on Tubes
- 2 Inside Bow Sets of 4 Orca (CSM) Fabric Handles on Tubes 2 Inside Stern Double Orca (CSM) Fabric Handles on Tubes

: 75hp / 56kw

- 3 Layer Reinforced Seams Paddle with Aluminum Shaft
- Paddle Holders
- Hand Pump

- Fuel Tank
- Bow Hatch Cushion
- Boat Cover
- Chock Set
- Bow Step with Fold Down Stainless Steel Cleat
- Lateral Fold Down Stainless Steel Cleat
- Removable Rowing Seat

Bimini Top

Maintenance KitOwner's Manual

- Fiberglass Console
- Fiberglass Console with Forward Seat

: 20" / 50.8cm

- Bench Seat with Storage
- Two person Jockey Seat
- Stainless Steel Helm Unit



17VS

Open FiberglassTenders



Overal Length : 17′/ 5.18m Number of Chambers : 5 Shaft Length : 20" / 50.8cm **Overal Beam Person Capacity** : 15 RDC Design Category : C : 8'1"/ 2.46m Inside Length : 13'1"/ 4.00m Weight : 772lb / 350kg Inside Beam Recommended HP : 75hp / 56kw

Tube Diameter

■ Hand Laid Fiberglass Deep "V" Hull

Plastic External Transom Plate

Raised Double Solid Rub Rail

Stainless Steel Bow Eye

Stringer System Laminated into Hull Bow Locker/ Seat Diamond Shape Non - Skid Deck

: 4'4"/ 1.33m

Maximum HP : 20"/ 0.50m

4 Stainless Steel Davit Lifting Points

Stainless Steel Towing Rings & Tie Downs
2 Deck Drains with Plug
1 Front & 4 Side Orca (CSM) Fabric Handles on Tubes

2 Inside Bow Sets of 3 Orca (CSM) Fabric Handles on Tubes 2 Inside Stern of 3 Orca (CSM) Fabric Handles on Tubes

: 90hp/67kw

Aluminum Internal Transom Plate
Orca (CSM) Five Layer Coated Fabric
4 Push Plastic Non-Corrosive 2 Stage Inflation Valves

3 Layer Reinforced Seams Paddle with Aluminum Shaft

Paddle Holders

Hand Pump

SП

■ Fuel Tank

Bow Hatch Cushion

Boat Cover

Chock Set

Bow Step with Fold Down Stainless Steel Cleat

Lateral Fold Down Stainless Steel Cleat

Removable Rowing Seat

Bimini Top

Maintenance Kit

Owner's Manual

■ Fiberglass Console

■ Fiberglass Console with Forward Seat

Bench Seat with Storage

Two person Jockey Seat

Stainless Steel Helm Unit





Overal Length	:	19′/ 5.79m	Number of Chambers	:	5	Shaft Length	: 25" / 63.5cm
Overal Beam	:	8′4″/ 2.53m	Person Capacity	:	15	RDC Design Category	: C
Inside Length	:	15′2″/ 4.62m	Weight	:	1157lb / 526kg		
Inside Beam	:	4′1″/ 1.25m	Recommended HP	:	115hp / 85.8kw		
Tube Diameter	:	22"/ 0.56m	Maximum HP	:	150hp / 111.9kw		

- Hand Laid Fiberglass Deep "V" Hull
- Stringer System Laminated into Hull Bow Locker/ Seat Diamond Shape Non Skid Deck Plastic External Transom Plate Aluminum Internal Transom Plate

- Orca (CSM) Five Layer Coated Fabric
 4 Push Push Plastic Non-Corrosive 2 Stage Inflation Valves
- Raised Double Solid Rub Rail Stainless Steel Bow Eye

- 4 Stainless Steel Davit Lifting Points
- Stainless Steel Towing Rings & Tie Downs

- Deck Condensation Plug
 2 Deck Drains with Plug
 1 Front & 4 Side Orca (CSM) Fabric Handles on Tubes
 2 Inside Bow Sets of 2 Orca (CSM) Fabric Handles on Tubes
 2 Inside Stern Double Orca (CSM) Fabric Handles on Tubes
- 3 Layer Reinforced Seams
- Paddle with Aluminum Shaft Paddle Holders

- Hand Pump
- Maintenance Kit
- Owner's ManualDeck Storage

- Fuel Tank
- **Bow Hatch Cushion**
- Boat Cover
- Chock Set
- Bow Step with Fold Down Stainless Steel Cleat
- Lateral Fold Down Stainless Steel Cleat
- Removable Rowing Seat

- Bimini Top
- Fiberglass Console
- Fiberglass Console with Forward Seat
- Bench Seat with Storage
- Two person Jockey Seat
- Stainless Steel Helm Unit



