


Profile

A 11-S SUPERLIGHT Professional Shallow Water **Aluminum Boats**

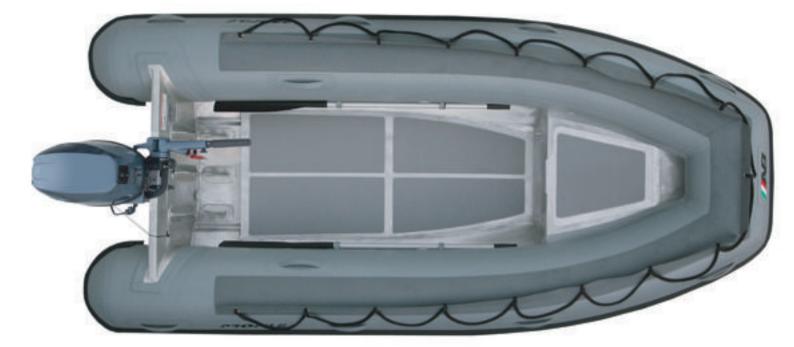

	Overal Length	: 11'6"/ 3.50m	Number of Chambers	: 3	Shaft Length	:15″/38.1cm
S P E C S	Overal Beam	: 5'7"/ 1.70m	Person Capacity	: 6	RDC Design Category	: С
	Inside Length	: 8'6"/ 2.60m	Weight	: 227lb / 103kg		
	Inside Beam	: 2'8"/0.81m	Recommended HP	: 20hp /14.9kw		
	Tube Diameter	: 17″/ 0.43m	Maximum HP	: 30hp / 22.4kw		

- Marine Grade Aluminum Hull Shallow Water Version
- Stringer System Welded Under Aluminum Deck
- Life Line Áround Tube Non Skid(CSM) Coated Fabric on Tube's Surface
- Pressure Relief Valves
- Drain Scuppers

ND сυ

ЧЧ

 $\Box \supset$

z⊢

 $\triangleleft \triangleleft$

μш

νц

<u>ہ ר</u>

∢ш

ZĽ

0⊃

⊢∢

ு ய

Оц

- Heavy Duty Transom Knee Non - Skid Rubber Floor Panels
- Plastic External Transom Plate
- Aluminum Internal Transom Plate

- Aluminum Bow Eye
- 4 Aluminum Davit Lifting Points
- Aluminum Transom Tie Down & Towing Rings
 Aluminum Bow Tie Down & Towing Rings
- Deck Drain with Plug
- Heavy Duty 1670 Decitex Orca(CSM) Five Layer Coated Fabric Double Solid Rub Rails
- Push Push Plastic Non-Corrosive 2 Stage Inflation Valves 1 Front & 4 Side Orca(CSM) Fabric Handles on Tubes

Paddles with Aluminum Shaft

3 Layer Reinforced Seams

Rubber Protector on Full Length of Keel

Paddle Holders

Hand Pump

Maintenance Kit
 Owner's Manual

- Tube Chaps
- Boat Cover
- **Chock Set**
- Bow Step with Fold Down Stainless Steel Cleat
- Lateral Fold Down Stainless Steel Cleat
- Removable Rowing Seat
- Fiberglass Console with Forward Seat
- Fiberglass Console
- Customized Aluminum Consoles & Seats Upon Request



- One Person Jockey Seat
- Two Person Jockey Seat
- Stainless Steel Helm Unit
- Bow Locker/ Seat
- Aluminum Console
- Aluminum Lean On
- 6 Gal. Portable Fuel Tank Installed in Bow Locker
- Bench Seat with Storage