
S



## **Profile**

## A 12-S SUPERLIGHT Professional Shallow Water **Aluminum Boats**

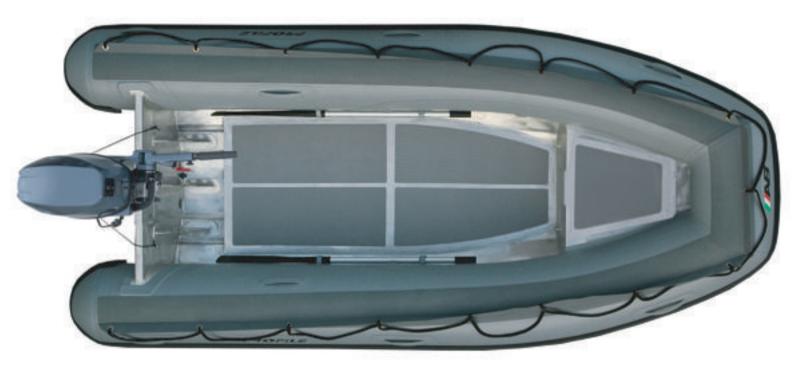

Overal Length	:	12'/ 3.66m	Number of Chambers	:	3	Shaft Length	: 15"/38.1cm
Overal Beam	:	5′11″/ 1.8m	Person Capacity	:	6	RDC Design Category	: C
Inside Length	:	8′10″/ 2.70m	Weight	:	242lb / 110kg		
Inside Beam	:	2′10″/ 0.86m	Recommended HP	:	25hp /18.7kw		
Tube Diameter	:	18"/ 0.46m	Maximum HP	:	30hp / 22.4kw		

- Marine Grade Aluminum Hull Shallow Water Version
- Stringer System Welded Under Aluminum Deck Life Line Around Tube
- Non Skid(CSM) Coated Fabric on Tube's Surface
- Pressure Relief Valves
- Drain Scuppers
- Heavy Duty Transom Knee
- Non Skid Rubber Floor Panels Plastic External Transom Plate
- Aluminum Internal Transom Plate

- Aluminum Bow Eye
- 4 Aluminum Davit Lifting Points
- Aluminum Transom Tie Down & Towing RingsAluminum Bow Tie Down & Towing Rings
- Deck Drain with Plug
- Heavy Duty 1670 Decitex Orca(CSM) Five Layer Coated Fabric
- Double Solid Rub Rails
- Push Push Plastic Non-Corrosive 2 Stage Inflation Valves 1 Front & 4 Side Orca(CSM) Fabric Handles on Tubes
- Paddles with Aluminum Shaft
- Paddle Holders
- Hand Pump
- Maintenance Kit Owner's Manual
- 3 Layer Reinforced Seams
- Rubber Protector on Full Length of Keel

- Tube Chaps
- Boat Cover
- Bow Step with Fold Down Stainless Steel Cleat
- Lateral Fold Down Stainless Steel Cleat
- Removable Rowing Seat
- Fiberglass Console with Forward Seat
- Fiberglass Console
- Customized Aluminum Consoles & Seats Upon Request

- One Person Jockey Seat
- Two Person Jockey Seat
- Stainless Steel Helm Unit
- Bow Locker/ Seat
- Aluminum Console
- Aluminum Lean On
- 6 Gal. Portable Fuel Tank Installed in Bow Locker
- Bench Seat with Storage

