



A B I N F L A T A B L E S

ventus

8VL

Lightweight Fiberglass Tender



S P E C S

Overall Length	: 8'6" / 2.60m	Number of Chambers	: 3 + 1	Shaft Length	: 15" / 38.1cm
Overall Beam	: 5'6" / 1.68m	Person Capacity	: 4	RDC Design Category	: C
Inside Length	: 5'10" / 1.79m	Weight	: 95lb / 43kg		
Inside Beam	: 2'4" / 0.72m	Recommended HP	: 8hp / 6kw		
Tube Diameter	: 16" / 0.40m	Maximum HP	: 10hp / 7.5kw		

S T A N D A R D
F E A T U R E S

- Hand Laid Fiberglass Deep "V" Hull
- Stringer System Laminated into Hull
- Non - Skid Rubber Floor Pannels
- Plastic External Transom Plate
- Aluminum Internal Transom Plate with Security Lip
- Stainless Steel Bow Eye
- Stainless Steel 3 Davit Lifting Points
- Inner Hull Drain with Plug
- Deck Condensation Plug
- Orca(CSM) Five Layer Coated Fabric
- Raised Single Rub Rail
- Push Push Plastic Non-Corrosive 2 Stage Inflation Valves
- 1 Front & 2 Side Orca(CSM) Fabric Handles on Tubes
- 2 Inside Bow Sets of 2 Orca(CSM) Fabric Handles on Tubes
- 2 Inside Stern Single Orca(CSM) Fabric Handles on Tubes
- Removable Rowing Seat
- Oarlock Bases
- Telescopic Oars with Aluminum Shaft
- Paddle Holders
- Hand Pump
- Maintenance Kit
- Owner's Manual
- Additional Air Retaining Chamber Under the Floor
- 3 Layer Reinforced Seams

O P T I O N A L
F E A T U R E S

- Tube Chaps
- Boat Cover
- Chock Set
- Bow Step with Fold Down Stainless Steel Cleat
- Lateral Fold Down Stainless Steel Cleat



www.abinflatables.com

ventus

9VL

Lightweight Fiberglass Tender



S P E C S

Overall Length	: 9'6" / 2.90m	Number of Chambers	: 3 + 1	Shaft Length	: 15" / 38.1cm
Overall Beam	: 5'7" / 1.72m	Person Capacity	: 4	RDC Design Category	: C
Inside Length	: 6'9" / 2.06m	Weight	: 106lb / 48kg		
Inside Beam	: 2'8" / 0.81m	Recommended HP	: 9.9hp / 7.4kw		
Tube Diameter	: 17" / 0.43m	Maximum HP	: 15hp / 11.2kw		


S T A N D A R D
F E A T U R E S

- Hand Laid Fiberglass Deep "V" Hull
- Stringer System Laminated into Hull
- Non - Skid Rubber Floor Pannels
- Plastic External Transom Plate
- Aluminum Internal Transom Plate with Security Lip
- Stainless Steel Bow Eye
- Stainless Steel 3 Davit Lifting Points
- Inner Hull Drain with Plug
- Deck Condensation Plug
- Orca(CSM) Five Layer Coated Fabric
- Raised Single Rub Rail
- Push Push Plastic Non-Corrosive 2 Stage Inflation Valves
- 1 Front & 2 Side Orca(CSM) Fabric Handles on Tubes
- 2 Inside Bow Sets of 2 Orca(CSM) Fabric Handles on Tubes
- 2 Inside Stern Single Orca(CSM) Fabric Handles on Tubes
- Removable Rowing Seat
- Oarlock Bases
- Telescopic Oars with Aluminum Shaft
- Paddle Holders
- Hand Pump
- Maintenance Kit
- Owner's Manual
- Additional Air Retaining Chamber Under the Floor
- 3 Layer Reinforced Seams

O P T I O N A L
F E A T U R E S

- Tube Chaps
- Boat Cover
- Chock Set
- Bow Step with Fold Down Stainless Steel Cleat
- Lateral Fold Down Stainless Steel Cleat
- Removable Stern Seat



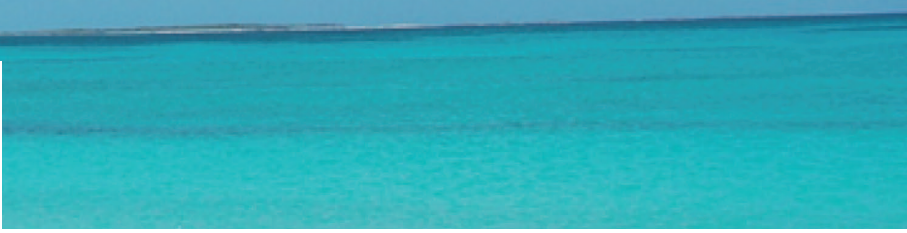

ventus | **10VL** | **Lightweight Fiberglass Tender**



S P E C S	Overall Length : 10'6" / 3.19m	Number of Chambers : 3 + 1	Shaft Length : 15" / 38.1cm
	Overall Beam : 5'7" / 1.72m	Person Capacity : 5	RDC Design Category : C
	Inside Length : 7'7" / 2.31m	Weight : 123lb / 56kg	
	Inside Beam : 2'8" / 0.81m	Recommended HP : 15hp / 11.2kw	
	Tube Diameter : 17" / 0.43m	Maximum HP : 25hp / 18.7kw	

S T A N D A R D F E A T U R E S	<ul style="list-style-type: none"> ■ Hand Laid Fiberglass Deep "V" Hull ■ Stringer System Laminated into Hull ■ Non - Skid Rubber Floor Pannels ■ Plastic External Transom Plate ■ Aluminum Internal Transom Plate with Security Lip ■ Stainless Steel Bow Eye ■ Stainless Steel 3 Davit Lifting Points ■ Inner Hull Drain with Plug 	<ul style="list-style-type: none"> ■ Deck Condensation Plug ■ Orca(CSM) Five Layer Coated Fabric ■ Raised Single Rub Rail ■ Push Push Plastic Non-Corrosive 2 Stage Inflation Valves ■ 1 Front & 2 Side Orca(CSM) Fabric Handles on Tubes ■ 2 Inside Bow Sets of 2 Orca(CSM) Fabric Handles on Tubes ■ 2 Inside Stern Set of 2 Orca(CSM) Fabric Handles on Tubes ■ Removable Rowing Seat 	<ul style="list-style-type: none"> ■ Oarlock Bases ■ Telescopic Oars with Aluminum Shaft ■ Paddle Holders ■ Hand Pump ■ Maintenance Kit ■ Owner's Manual ■ Additional Air Retaining Chamber Under the Floor ■ 3 Layer Reinforced Seams
--	--	--	--

O P T I O N A L F E A T U R E S	<ul style="list-style-type: none"> ■ Tube Chaps ■ Boat Cover ■ Chock Set ■ Bow Step with Fold Down Stainless Steel Cleat 	<ul style="list-style-type: none"> ■ Lateral Fold Down Stainless Steel Cleat ■ Removable Stern Seat
--	--	---



ventus

12VL

Lightweight Fiberglass Tender



S P E C S

Overall Length	: 12' / 3.66m	Number of Chambers	: 3 + 1	Shaft Length	: 15" / 38.1cm
Overall Beam	: 5'11" / 1.77m	Person Capacity	: 6	RDC Design Category	: C
Inside Length	: 8'9" / 2.67m	Weight	: 156lb / 71kg		
Inside Beam	: 2'9" / 0.84m	Recommended HP	: 20hp / 14.9kw		
Tube Diameter	: 18" / 0.46m	Maximum HP	: 30hp / 22.4kw		

**S T A N D A R D
F E A T U R E S**

- Hand Laid Fiberglass Deep "V" Hull
- Stringer System Laminated into Hull
- Non - Skid Rubber Floor Pannels
- Plastic External Transom Plate
- Aluminum Internal Transom Plate with Security Lip
- Stainless Steel Bow Eye
- Stainless Steel 3 Davit Lifting Points
- Inner Hull Drain with Plug
- Deck Condensation Plug
- Orca(CSM) Five Layer Coated Fabric
- Raised Single Rub Rail
- Push Push Plastic Non-Corrosive 2 Stage Inflation Valves
- 1 Front & 2 Side Orca(CSM) Fabric Handles on Tubes
- 2 Inside Bow Sets of 2 Orca(CSM) Fabric Handles on Tubes
- 2 Inside Stern Single Orca(CSM) Fabric Handles on Tubes
- Removable Stern Seat
- Paddles with Aluminum Shaft
- Paddle Holders
- Hand Pump
- Maintenance Kit
- Owner's Manual
- Additional Air Retaining Chamber Under the Floor
- 3 Layer Reinforced Seams

**O P T I O N A L
F E A T U R E S**

- Tube Chaps
- Boat Cover
- Chock Set
- Bow Step with Fold Down Stainless Steel Cleat
- Lateral Fold Down Stainless Steel Cleat
- Removable Rowing Seat

