




A B I N F L A T A B L E S

alumina

9.5ALX

Aluminum Console Tenders

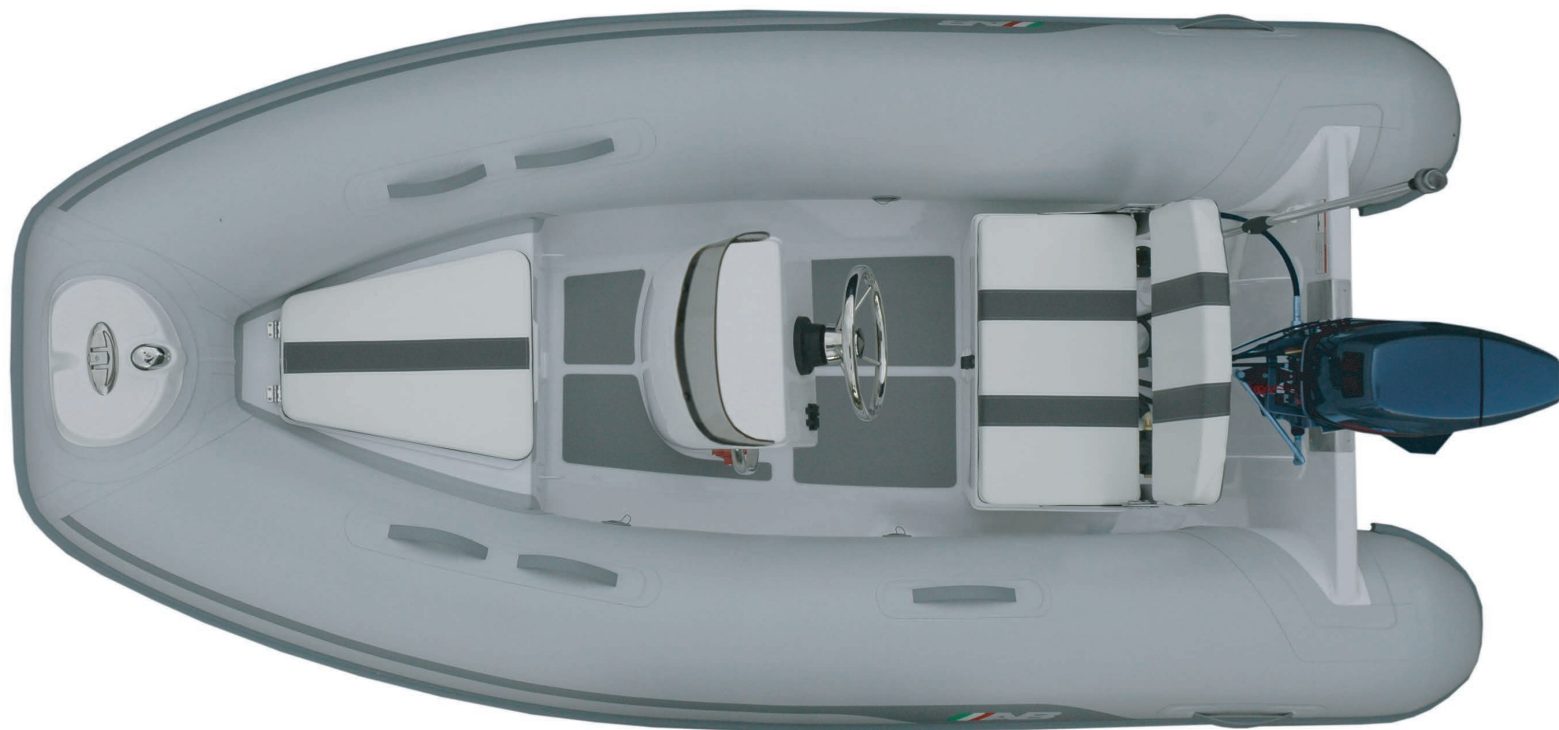

S P E C S

| | | | | | |
|----------------|-----------------|--------------------|-----------------|---------------------|----------------|
| Overall Length | : 9'6" / 2.90m | Number of Chambers | : 3 | Shaft Length | : 20" / 50.8cm |
| Overall Beam | : 5'6" / 1.68m | Person Capacity | : 5 | RDC Design Category | : C |
| Inside Length | : 6'11" / 2.11m | Weight | : 249lb / 113kg | | |
| Inside Beam | : 2'6" / 0.76m | Recommended HP | : 10hp / 7.5kw | | |
| Tube Diameter | : 17" / 0.43m | Maximum HP | : 20hp / 14.9kw | | |

S T A N D A R D
F E A T U R E S

- Deep "V" Marine GRADE Aluminum Hull
- Stringer System Welded under Aluminum Deck
- Heavy Duty Transom Knees
- Non-Skid Rubber Floor Panels
- Plastic External Transom Plate
- Aluminum Internal Transom Plate
- Aluminum Bow Eye
- 4 Aluminum Davit Lifting Points
- Aluminum Transom Tie Down & Towing Rings
- Aluminum Bow Tie Down & Towing Rings
- Deck Drain with Plug
- Orca (CSM) Five Layer Coated Fabric
- Raised Single Rub Rail
- Push Push Plastic Non-Corrosive 2 Stage Inflation Valves
- 1 Front & 2 Side Orca (CSM) Fabric Handles on Tubes
- 2 Inside Bow Sets of Double Orca (CSM) Fabric Handles on Tubes
- 2 Inside Stern Single Orca (CSM) Fabric Handles on Tubes
- Hand Pump
- Maintenance Kit
- Owner's Manual
- Closed Cell Foam Upholstery
- Fiberglass Console Small - Slim
- Bench Seat with Storage - Slim
- Bow Locker/Seat
- Bow Hatch Cushion
- Console Access Lid
- Bow Step with Fold Down Stainless Steel Cleat & LED Running Lights
- 360° LED White Light Navigation Pole
- Plexiglass Windshield
- Stainless Steel Console Grab Rail
- Battery Box
- Battery Switch
- Fuel and Water Separator Filter
- Mechanical Steering System
- Stainless Steel Steering Wheel
- Complete Tin Wiring & Heat Shrink Sealed Terminals
- 3 Layer Reinforced Seams
- Rubber Protector on Full Length of Keel
- Stainless Steel Gas Springs
- Automatic Bilge Pump

O P T I O N A L
F E A T U R E S

- Boat Cover
- Chock Set
- Transom Ladder
- Bimini Top with Stainless Steel Tubing
- Console Cover
- Lifting Harness
- Teak Floor
- CD/Radio System
- Compass
- GPS
- VHF Package



www.abinflatables.com



S P E C S

| | | | | | |
|----------------|-----------------|--------------------|-----------------|---------------------|----------------|
| Overall Length | : 10'6" / 3.19m | Number of Chambers | : 3 | Shaft Length | : 20" / 50.8cm |
| Overall Beam | : 5'6" / 1.68m | Person Capacity | : 5 | RDC Design Category | : C |
| Inside Length | : 7'6" / 2.30m | Weight | : 255lb / 116kg | | |
| Inside Beam | : 2'8" / 0.81m | Recommended HP | : 15hp / 11.2kw | | |
| Tube Diameter | : 17" / 0.43m | Maximum HP | : 20hp / 14.9kw | | |

S T A N D A R D
F E A T U R E S

- Deep "V" Marine GRADE Aluminum Hull
- Stringer System Welded under Aluminum Deck
- Heavy Duty Transom Knees
- Non-Skid Rubber Floor Panels
- Plastic External Transom Plate
- Aluminum Internal Transom Plate
- Aluminum Bow Eye
- 4 Aluminum Davit Lifting Points
- Aluminum Transom Tie Down & Towing Rings
- Aluminum Bow Tie Down & Towing Rings
- Deck Drain with Plug
- Orca (CSM) Five Layer Coated Fabric
- Raised Single Rub Rail
- Push Push Plastic Non-Corrosive 2 Stage Inflation Valves
- 1 Front & 2 Side Orca (CSM) Fabric Handles on Tubes
- 2 Inside Bow Sets of Double Orca (CSM) Fabric Handles on Tubes
- 2 Inside Stern Single Orca (CSM) Fabric Handles on Tubes
- Hand Pump
- Maintenance Kit
- Owner's Manual
- Closed Cell Foam Upholstery
- Fiberglass Console Small
- Bench Seat with Storage
- Bow Locker/Seat
- Bow Hatch Cushion
- Console Access Lid
- Bow Step with Fold Down Stainless Steel Cleat & LED Running Lights
- 360° LED White Light Navigation Pole
- Stainless Steel Console Grab Rail
- Battery Box
- Battery Switch
- Fuel and Water Separator Filter
- Mechanical Steering System
- Stainless Steel Steering Wheel
- Complete Tin Wiring & Heat Shrink Sealed Terminals
- 3 Layer Reinforced Seams
- Rubber Protector on Full Length of Keel
- Stainless Steel Gas Springs
- Automatic Bilge Pump

O P T I O N A L
F E A T U R E S

- Boat Cover
- Chock Set
- Transom Ladder
- Bimini Top with Stainless Steel Tubing
- Console Cover
- Lifting Harness
- Teak Floor
- CD/Radio System
- Compass
- GPS
- VHF Package





S P E C S

| | | | | | |
|----------------|-----------------|--------------------|-----------------|---------------------|----------------|
| Overall Length | : 11'6" / 3.50m | Number of Chambers | : 3 | Shaft Length | : 20" / 50.8cm |
| Overall Beam | : 5'7" / 1.70m | Person Capacity | : 5 | RDC Design Category | : C |
| Inside Length | : 8'6" / 2.60m | Weight | : 284lb / 129kg | | |
| Inside Beam | : 2'8" / 0.81m | Recommended HP | : 20hp / 14.9kw | | |
| Tube Diameter | : 17" / 0.43m | Maximum HP | : 30hp / 22.4kw | | |

S T A N D A R D
F E A T U R E S

- Deep "V" Marine GRADE Aluminum Hull
- Stringer System Welded under Aluminum Deck
- Heavy Duty Transom Knees
- Non-Skid Rubber Floor Panels
- Plastic External Transom Plate
- Aluminum Internal Transom Plate
- Aluminum Bow Eye
- 4 Aluminum Davit Lifting Points
- Aluminum Transom Tie Down & Towing Rings
- Aluminum Bow Tie Down & Towing Rings
- Deck Drain with Plug
- Orca (CSM) Five Layer Coated Fabric
- Raised Single Rub Rail
- Push Push Plastic Non-Corrosive 2 Stage Inflation Valves
- 1 Front & 2 Side Orca (CSM) Fabric Handles on Tubes
- 2 Inside Bow Sets of Double Orca (CSM) Fabric Handles on Tubes
- 2 Inside Stern Single Orca (CSM) Fabric Handles on Tubes
- Hand Pump
- Maintenance Kit
- Owner's Manual
- Closed Cell Foam Upholstery
- Fiberglass Console
- Bench Seat with Storage
- Bow Locker/Seat
- Bow Hatch Cushion
- Console Front Access Lid
- Bow Step with Fold Down Stainless Steel Cleat & LED Running Lights
- 360° LED White Light Navigation Pole
- Lateral Fold Down Stainless Steel Cleat
- Stainless Steel Console Grab Rail
- Plexiglass Windshield
- Deluxe Carbon Fiber Style Panel
- 4 Waterproof Rocker Switches with Circuit Brakers
- Battery Box
- Battery Switch
- Fuel and Water Separator Filter
- Mechanical Steering System
- Stainless Steel Steering Wheel
- Complete Tin Wiring & Heat Shrink Sealed Terminals
- 3 Layer Reinforced Seams
- Rubber Protector on Full Length of Keel
- Stainless Steel Gas Springs
- Automatic Bilge Pump

O P T I O N A L
F E A T U R E S

- Tube Chaps
- Boat Cover
- Chock Set
- Transom Ladder
- Bimini Top with Stainless Steel Tubing
- Console Cover
- Lifting Harness
- Teak Floor
- CD/Radio System
- Compass
- GPS
- VHF Package



alumina

12ALX

Aluminum Console Tenders



S P E C S

| | | | | | |
|----------------|-----------------|--------------------|-----------------|---------------------|----------------|
| Overall Length | : 12' / 3.66m | Number of Chambers | : 3 | Shaft Length | : 20" / 50.8cm |
| Overall Beam | : 6'1" / 1.85m | Person Capacity | : 6 | RDC Design Category | : C |
| Inside Length | : 8'10" / 2.70m | Weight | : 315lb / 143kg | | |
| Inside Beam | : 2'11" / 0.89m | Recommended HP | : 25hp / 18.7kw | | |
| Tube Diameter | : 18" / 0.46m | Maximum HP | : 30hp / 22.4kw | | |

S T A N D A R D
F E A T U R E S

- Deep "V" Marine GRADE Aluminum Hull
- Stringer System Welded under Aluminum Deck
- Heavy Duty Transom Knees
- Non-Skid Rubber Floor Panels
- Plastic External Transom Plate
- Aluminum Internal Transom Plate
- Aluminum Bow Eye
- 4 Aluminum Davit Lifting Points
- Aluminum Transom Tie Down & Towing Rings
- Aluminum Bow Tie Down & Towing Rings
- Deck Drain with Plug
- Orca (CSM) Five Layer Coated Fabric
- Raised Double Rub Rail
- Push Push Plastic Non-Corrosive 2 Stage Inflation Valves
- 1 Front & 2 Side Orca (CSM) Fabric Handles on Tubes
- 2 Inside Bow Sets of Double Orca (CSM) Fabric Handles on Tubes
- 2 Inside Stern Single Orca (CSM) Fabric Handles on Tubes
- Hand Pump
- Maintenance Kit
- Owner's Manual
- Closed Cell Foam Upholstery
- Fiberglass Console
- Bench Seat with Storage
- Bow Locker/Seat
- Bow Hatch Cushion
- Console Front Access Lid
- Bow Step with Fold Down Stainless Steel Cleat & LED Running Lights
- 360° LED White Light Navigation Pole
- Lateral Fold Down Stainless Steel Cleat
- Stainless Steel Console Grab Rail
- Plexiglass Windshield
- Deluxe Carbon Fiber Style Panel
- 4 Waterproof Rocker Switches with Circuit Brakers
- Battery Box
- Battery Switch
- Fuel and Water Separator Filter
- Mechanical Steering System
- Stainless Steel Steering Wheel
- Complete Tin Wiring & Heat Shrink Sealed Terminals
- 3 Layer Reinforced Seams
- Rubber Protector on Full Length of Keel
- Stainless Steel Gas Springs
- Automatic Bilge Pump

O P T I O N A L
F E A T U R E S

- Tube Chaps
- Boat Cover
- Chock Set
- Transom Ladder
- Bimini Top with Stainless Steel Tubing
- Console Cover
- Lifting Harness
- Teak Floor
- CD/Radio System
- Compass
- GPS
- VHF Package





S P E C S

| | | |
|-------------------------------|--------------------------------|-----------------------------|
| Overall Length : 13' / 3.96m | Number of Chambers : 3 | Shaft Length : 20" / 50.8cm |
| Overall Beam : 6'7" / 2.00m | Person Capacity : 7 | RDC Design Category : C |
| Inside Length : 9'10" / 3.00m | Weight : 341lb / 155kg | |
| Inside Beam : 3'3" / 0.99m | Recommended HP : 30hp / 22.4kw | |
| Tube Diameter : 18" / 0.46m | Maximum HP : 40hp / 29.8kw | |

S T A N D A R D
F E A T U R E S

- Deep "V" Marine GRADE Aluminum Hull
- Stringer System Welded under Aluminum Deck
- Heavy Duty Transom Knees
- Non-Skid Rubber Floor Panels
- Plastic External Transom Plate
- Aluminum Internal Transom Plate
- Aluminum Bow Eye
- 4 Aluminum Davit Lifting Points
- Aluminum Transom Tie Down & Towing Rings
- Aluminum Bow Tie Down & Towing Rings
- Deck Drain with Plug
- Orca (CSM) Five Layer Coated Fabric
- Double Rub Rail
- Push Push Plastic Non-Corrosive 2 Stage Inflation Valves
- 1 Front & 4 Side Orca (CSM) Fabric Handles on Tubes
- 2 Inside Bow Sets of Double Orca (CSM) Fabric Handles on Tubes
- 2 Inside Stern Double Orca (CSM) Fabric Handles on Tubes
- Hand Pump
- Maintenance Kit
- Owner's Manual
- Closed Cell Foam Upholstery
- Fiberglass Console with Forward Seat & Cushion
- Bench Seat with Storage
- Bow Locker/Seat
- Bow Hatch Cushion
- Console Front Access Lid
- Bow Step with Fold Down Stainless Steel Cleat & LED Running Lights
- 360° LED White Light Navigation Pole
- Lateral Fold Down Stainless Steel Cleat
- Stainless Steel Console Grab Rail
- Plexiglass Windshield
- Deluxe Carbon Fiber Style Panel
- 4 Waterproof Rocker Switches with Circuit Brakers
- Battery Box
- Battery Switch
- Fuel and Water Separator Filter
- Mechanical Steering System
- Stainless Steel Steering Wheel
- Complete Tin Wiring & Heat Shrink Sealed Terminals
- 3 Layer Reinforced Seams
- Rubber Protector on Full Length of Keel
- Stainless Steel Gas Springs
- Automatic Bilge Pump

O P T I O N A L
F E A T U R E S

- Tube Chaps
- Boat Cover
- Chock Set
- Transom Ladder
- Bimini Top with Stainless Steel Tubing
- Console Cover
- Lifting Harness
- Teak Floor
- CD/Radio System
- Compass
- GPS
- VHF Package



alumina

14ALX

Aluminum Console Tenders



| | | | |
|-----------|--------------------------------|--------------------------------|-----------------------------|
| S P E C S | Overall Length : 14' / 4.27m | Number of Chambers : 4 | Shaft Length : 20" / 50.8cm |
| | Overall Beam : 6'7" / 2.00m | Person Capacity : 8 | RDC Design Category : C |
| | Inside Length : 10'10" / 3.30m | Weight : 367lb / 167kg | |
| | Inside Beam : 3'3" / 0.99m | Recommended HP : 40hp / 29.8kw | |
| | Tube Diameter : 19" / 0.48m | Maximum HP : 50hp / 37.3kw | |

| | | | |
|------------------------------------|--|--|---|
| S T A N D A R D F E A T U R E S | <ul style="list-style-type: none"> ■ Deep "V" Marine GRADE Aluminum Hull ■ Stringer System Welded under Aluminum Deck ■ Heavy Duty Transom Knees ■ Non-Skid Rubber Floor Panels ■ Plastic External Transom Plate ■ Aluminum Internal Transom Plate ■ Aluminum Bow Eye ■ 4 Aluminum Davit Lifting Points ■ Aluminum Transom Tie Down & Towing Rings ■ Aluminum Bow Tie Down & Towing Rings ■ Deck Drain with Plug ■ Orca (CSM) Five Layer Coated Fabric ■ Double Rub Rail ■ Push Push Plastic Non-Corrosive 2 Stage Inflation Valves ■ 1 Front & 4 Side Orca (CSM) Fabric Handles on Tubes ■ 2 Inside Bow Sets of Triple Orca (CSM) Fabric Handles on Tubes | <ul style="list-style-type: none"> ■ 2 Inside Stern Double Orca (CSM) Fabric Handles on Tubes ■ Hand Pump ■ Maintenance Kit ■ Owner's Manual ■ Closed Cell Foam Upholstery ■ Fiberglass Console with Forward Seat & Cushion ■ Bench Seat with Storage ■ Bow Locker/Seat ■ Bow Hatch Cushion ■ Console Front Access Lid ■ Bow Step with Fold Down Stainless Steel Cleat & LED Running Lights ■ 360° LED White Light Navigation Pole ■ Lateral Fold Down Stainless Steel Cleat ■ Stainless Steel Console Grab Rail ■ Plexiglass Windshield ■ Deluxe Carbon Fiber Style Panel | <ul style="list-style-type: none"> ■ 4 Waterproof Rocker Switches with Circuit Brakers ■ Battery Box ■ Battery Switch ■ Fuel and Water Separator Filter ■ Mechanical Steering System ■ Stainless Steel Steering Wheel ■ Complete Tin Wiring & Heat Shrink Sealed Terminals ■ 3 Layer Reinforced Seams ■ Rubber Protector on Full Length of Keel ■ Stainless Steel Gas Springs ■ Automatic Bilge Pump |
|------------------------------------|--|--|---|

| | | |
|------------------------------------|--|---|
| O P T I O N A L F E A T U R E S | <ul style="list-style-type: none"> ■ Tube Chaps ■ Boat Cover ■ Chock Set ■ Transom Ladder ■ Bimini Top with Stainless Steel Tubing ■ Console Cover | <ul style="list-style-type: none"> ■ Lifting Harness ■ Teak Floor ■ CD/Radio System ■ Compass ■ GPS ■ VHF Package |
|------------------------------------|--|---|





S P E C S

| | | | | | |
|----------------|-----------------|--------------------|-----------------|---------------------|----------------|
| Overall Length | : 15' / 4.57m | Number of Chambers | : 5 | Shaft Length | : 20" / 50.8cm |
| Overall Beam | : 6'9" / 2.06m | Person Capacity | : 9 | RDC Design Category | : C |
| Inside Length | : 11'8" / 3.55m | Weight | : 392lb / 178kg | | |
| Inside Beam | : 3'4" / 1.03m | Recommended HP | : 50hp / 37.3kw | | |
| Tube Diameter | : 19" / 0.48m | Maximum HP | : 60hp / 44.8kw | | |

S T A N D A R D
F E A T U R E S

- Deep "V" Marine GRADE Aluminum Hull
- Stringer System Welded under Aluminum Deck
- Heavy Duty Transom Knees
- Non-Skid Rubber Floor Panels
- Plastic External Transom Plate
- Aluminum Internal Transom Plate
- Aluminum Bow Eye
- 4 Aluminum Davit Lifting Points
- Aluminum Transom Tie Down & Towing Rings
- Aluminum Bow Tie Down & Towing Rings
- Deck Drain with Plug
- Orca (CSM) Five Layer Coated Fabric
- Double Rub Rail
- Push Push Plastic Non-Corrosive 2 Stage Inflation Valves
- 1 Front & 4 Side Orca (CSM) Fabric Handles on Tubes
- 2 Inside Bow Sets of Quadruple Orca (CSM) Fabric Handles on Tubes
- 2 Inside Stern Double Orca (CSM) Fabric Handles on Tubes
- Hand Pump
- Maintenance Kit
- Owner's Manual
- Closed Cell Foam Upholstery
- Fiberglass Console with Forward Seat & Cushion
- Bench Seat with Storage
- Bow Locker/Seat
- Bow Hatch Cushion
- Console Front Access Lid
- Bow Step with Fold Down Stainless Steel Cleat & LED Running Lights
- 360° LED White Light Navigation Pole
- Lateral Fold Down Stainless Steel Cleat
- Stainless Steel Console Grab Rail
- Plexiglass Windshield
- Deluxe Carbon Fiber Style Panel
- 4 Waterproof Rocker Switches with Circuit Brakers
- Battery Box
- Battery Switch
- Fuel and Water Separator Filter
- Mechanical Steering System
- Stainless Steel Steering Wheel
- Complete Tin Wiring & Heat Shrink Sealed Terminals
- 3 Layer Reinforced Seams
- Rubber Protector on Full Length of Keel
- Stainless Steel Gas Springs
- Automatic Bilge Pump

O P T I O N A L
F E A T U R E S

- Tube Chaps
- Boat Cover
- Chock Set
- Transom Ladder
- Bimini Top with Stainless Steel Tubing
- Console Cover
- Lifting Harness
- Teak Floor
- CD/Radio System
- Compass
- GPS
- VHF Package





S P E C S

| | | | | | |
|----------------|-----------------|--------------------|-----------------|---------------------|----------------|
| Overall Length | : 16' / 4.88m | Number of Chambers | : 5 | Shaft Length | : 20" / 50.8cm |
| Overall Beam | : 7' / 2.14m | Person Capacity | : 10 | RDC Design Category | : C |
| Inside Length | : 12'8" / 3.85m | Weight | : 530lb / 241kg | | |
| Inside Beam | : 3'6" / 1.08m | Recommended HP | : 50hp / 37.3kw | | |
| Tube Diameter | : 20" / 0.51m | Maximum HP | : 60hp / 44.8kw | | |

S T A N D A R D
F E A T U R E S

- Deep "V" Marine GRADE Aluminum Hull
- Stringer System Welded under Aluminum Deck
- Heavy Duty Transom Knees
- Non-Skid Rubber Floor Panels
- Plastic External Transom Plate
- Aluminum Internal Transom Plate
- Aluminum Bow Eye
- 4 Aluminum Davit Lifting Points
- Aluminum Transom Tie Down & Towing Rings
- Aluminum Bow Tie Down & Towing Rings
- Deck Drain with Plug
- Orca (CSM) Five Layer Coated Fabric
- Double Rub Rail
- Push Push Plastic Non-Corrosive 2 Stage Inflation Valves
- 1 Front & 4 Side Orca (CSM) Fabric Handles on Tubes
- 2 Inside Bow Sets of Quadruple Orca (CSM) Fabric Handles on Tubes
- 2 Inside Stern Sets of Triple Orca (CSM) Fabric Handles on Tubes
- Hand Pump
- Maintenance Kit
- Owner's Manual
- Closed Cell Foam Upholstery
- Fiberglass Console with Forward Seat & Cushion
- Bench Seat with Storage
- Bow Locker/Seat
- Bow Hatch Cushion
- Console Front Access Lid
- Bow Step with Fold Down Stainless Steel Cleat & LED Running Lights
- 360° LED White Light Navigation Pole
- Lateral Fold Down Stainless Steel Cleat
- Stainless Steel Console Grab Rail
- Plexiglass Windshield
- Deluxe Carbon Fiber Style Panel
- 4 Waterproof Rocker Switches with Circuit Breakers
- Battery Box
- Battery Switch
- Fuel and Water Separator Filter
- Mechanical Steering System
- Stainless Steel Steering Wheel
- Complete Tin Wiring & Heat Shrink Sealed Terminals
- 3 Layer Reinforced Seams
- Rubber Protector on Full Length of Keel
- Stainless Steel Gas Springs
- Automatic Bilge Pump

O P T I O N A L
F E A T U R E S

- Tube Chaps
- Boat Cover
- Chock Set
- Transom Ladder
- Bimini Top with Stainless Steel Tubing
- Console Cover
- Lifting Harness
- Teak Floor
- CD/Radio System
- Compass
- GPS
- VHF Package






A B I N F L A T A B L E S

alumina

18ALX

Aluminum Console Tenders

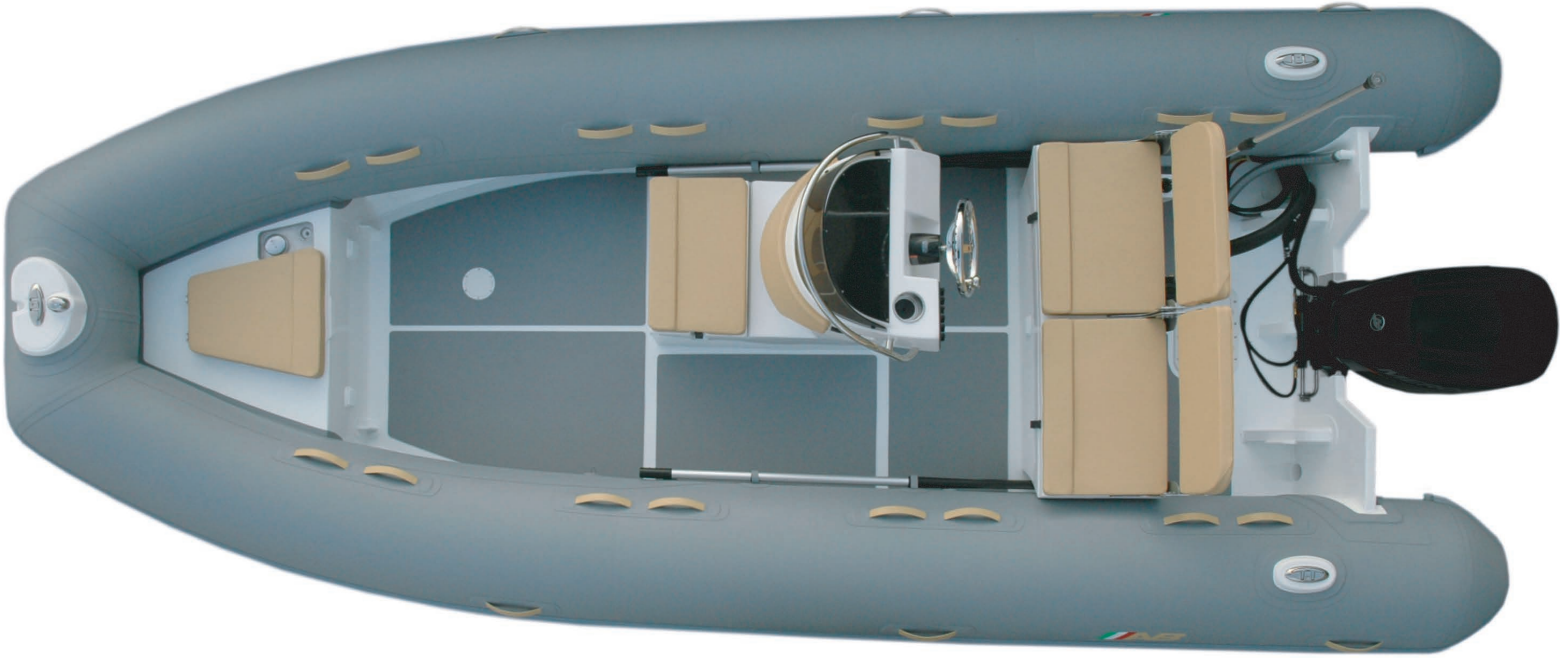

| | | | |
|-----------|--------------------------------|--------------------------------|------------------------------------|
| S P E C S | Overall Length : 18' / 5.49m | Number of Chambers : 5 | Shaft Length : 25" / 63.5cm |
| | Overall Beam : 7' 10" / 2.40m | Person Capacity : 12 | Gas Built in Tank : 32 Gal / 120 L |
| | Inside Length : 14' 8" / 4.47m | Weight : 895lb / 406kg | RDC Design Category : C |
| | Inside Beam : 4' 3" / 1.30m | Recommended HP : 90hp / 67.1kw | |
| | Tube Diameter : 21" / 0.53m | Maximum HP : 115hp / 85.8kw | |

| | | | |
|------------------------------------|---|--|---|
| S T A N D A R D F E A T U R E S | <ul style="list-style-type: none"> ■ Deep "V" Marine GRADE Aluminum Hull ■ Stringer System Welded under Aluminum Deck ■ Heavy Duty Transom Knees ■ Integrated Marine Grade Aluminum Fuel Tank ■ Stainless Steel Cup Holder ■ Non-Skid Rubber Floor Panels ■ Plastic External Transom Plate ■ Aluminum Internal Transom Plate ■ Aluminum Bow Eye ■ 4 Aluminum Davit Lifting Points ■ Aluminum Transom Tie Down & Towing Rings ■ Aluminum Bow Tie Down & Towing Rings ■ Deck Drain with Plug ■ Orca (CSM) Five Layer Coated Fabric ■ Double Rub Rail ■ Push Push Plastic Non-Corrosive 2 Stage Inflation Valves | <ul style="list-style-type: none"> ■ 1 Front & 4 Side Orca (CSM) Fabric Handles on Tubes ■ 2 Inside Bow Sets of Quadruple Orca (CSM) Fabric Handles on Tubes ■ 2 Inside Stern Sets of Triple Orca (CSM) Fabric Handles on Tubes ■ Hand Pump ■ Maintenance Kit ■ Owner's Manual ■ Closed Cell Foam Upholstery ■ Fiberglass Console with Forward Seat & Cushion ■ Bench Seat with Storage ■ Bow Locker/Seat ■ Bow Hatch Cushion ■ Console Front Access Lid ■ Bow Step with Fold Down Stainless Steel Cleat & LED Running Lights ■ 360° LED White Light Navigation Pole ■ Lateral Fold Down Stainless Steel Cleat ■ Stainless Steel Console Grab Rail | <ul style="list-style-type: none"> ■ Plexiglass Windshield ■ Deluxe Carbon Fiber Style Pannel ■ 4 Waterproof Rocker Switches with Circuit Brakers ■ Battery Box ■ Battery Switch ■ Fuel and Water Separator Filter ■ Hydraulic Steering System ■ Stainless Steel Steering Wheel ■ Complete Tin Wiring & Heat Shrink Sealed Terminals ■ 3 Layer Reinforced Seams ■ Rubber Protector on Full Length of Keel ■ Stainless Steel Gas Springs ■ Automatic Bilge Pump |
|------------------------------------|---|--|---|

| | | |
|------------------------------------|--|---|
| O P T I O N A L F E A T U R E S | <ul style="list-style-type: none"> ■ Tube Chaps ■ Boat Cover ■ Chock Set ■ Transom Ladder ■ Bimini Top with Stainless Steel Tubing ■ Console Cover | <ul style="list-style-type: none"> ■ Lifting Harness ■ Teak Floor ■ CD/Radio System ■ Compass ■ GPS ■ VHF Package |
|------------------------------------|--|---|



www.abinflatables.com