


Professional Fiberglass Boats

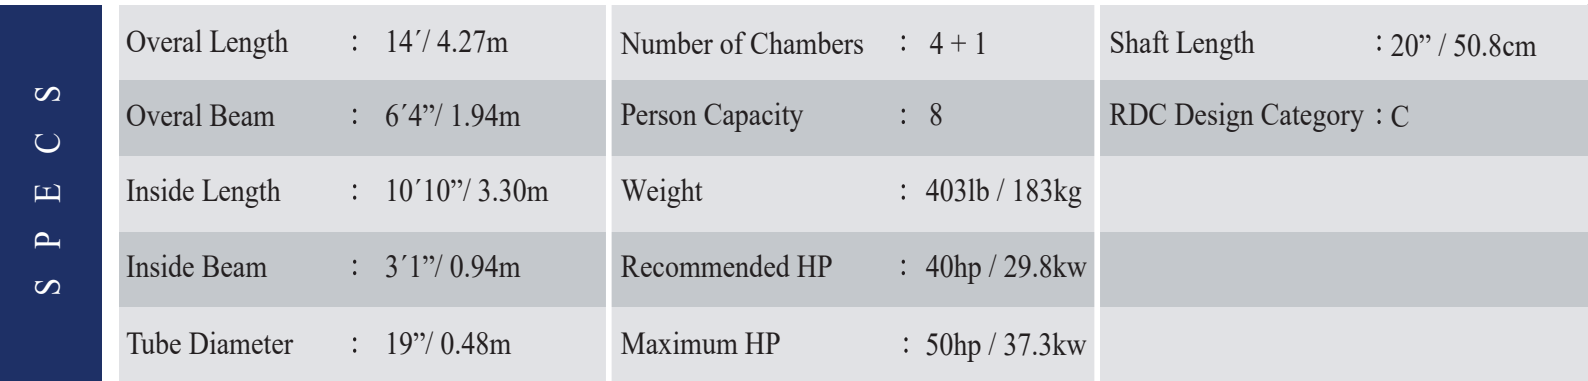

STANDARD


- Professional Grade Hand Laid Fiberglass Deep “V” Hull
- Stringer System Laminated into Hull
- Bow Locker/ Seat
- Diamond Shape Non - Skid Deck
- Plastic External Transom Plate
- Aluminum Internal Transom Plate
- Heavy Duty 1670 Decitex Orca (CSM) Five Layer Coated Fabric
- Life Line Around Tube
- Non - Skid (CSM) Coated Fabric on Tube’s Surface
- Pressure Relief Valves

- 4 Push Push Plastic Non-Corrosive 2 Stage Inflation Valves
- Double Solid Rub Rail
- Stainless Steel Bow Eye
- 4 Stainless Steel Davit Lifting Points
- Stainless Steel Towing Rings & Tie Downs
- Deck Condensation Plug
- Deck Drain with Plug
- 1 Front & 4 Side Orca (CSM) Fabric Handles on Tubes
- 3 Layer Reinforced Seams
- Paddle with Aluminum Shaft

- Paddle Holders
- Removable Stern Seat
- Hand Pump
- Maintenance Kit
- Owner's Manual
- Additional Air Retaining Chamber Under the Floor
- Drain Scuppers
- Rubber Protector on Full Length of Keel

OPTIONAL

- Bow Hatch Cushion
- Boat Cover
- Chock Set
- Bow Step with Fold Down Stainless Steel Cleat
- Lateral Fold Down Stainless Steel Cleat
- Removable Rowing Seat
- Bimini Top
- Fiberglass Console
- Fiberglass Console with Forward Seat
- Bench Seat with Storage
- Two person Jockey Seat
- Stainless Steel Helm Unit



Profile F

F 15

Professional Fiberglass Boats



S P E C S	Overall Length	: 15' / 4.57m	Number of Chambers	: 5	Shaft Length	: 20" / 50.8cm
	Overall Beam	: 6'6" / 1.99m	Person Capacity	: 11	Optional Fuel Tank	: 23 Gal / 87
	Inside Length	: 11'6" / 3.50m	Weight	: 484lb / 220kg	RDC Design Category : C	
	Inside Beam	: 3'2" / 0.97m	Recommended HP	: 60hp / 44.8kw		
	Tube Diameter	: 19" / 0.48m	Maximum HP	: 75hp / 56kw		

S T A N D A R D	<ul style="list-style-type: none">Professional Grade Hand Laid Fiberglass Deep "V" HullStringer System Laminated into HullBow Locker/ SeatDiamond Shape Non - Skid DeckPlastic External Transom PlateAluminum Internal Transom PlateHeavy Duty 1670 Decitex Orea (CSM) Five Layer Coated FabricLife Line Around TubeNon - Skid (CSM) Coated Fabric on Tube's SurfacePressure Relief Valves			<ul style="list-style-type: none">4 Push Push Plastic Non-Corrosive 2 Stage Inflation ValvesDouble Solid Rub RailStainless Steel Bow Eye4 Stainless Steel Davit Lifting PointsStainless Steel Towing Rings & Tie DownsDeck Condensation PlugDeck Drain with Plug1 Front & 5 Side Orea (CSM) Fabric Handles on Tubes3 Layer Reinforced SeamsPaddle with Aluminum Shaft		
				<ul style="list-style-type: none">Paddle HoldersHand PumpMaintenance KitOwner's ManualAdditional Air Retaining Chamber Under the FloorDrain ScuppersRubber Protector on Full Length of Keel		

O P T I O N A L	<ul style="list-style-type: none">Optional Fuel Tank 23 Gal / 87 LBow Hatch CushionBoat CoverChock SetBow Step with Fold Down Stainless Steel CleatLateral Fold Down Stainless Steel CleatRemovable Rowing Seat			<ul style="list-style-type: none">Bimini TopFiberglass ConsoleFiberglass Console with Forward SeatBench Seat with StorageTwo person Jockey SeatStainless Steel Helm Unit		



Profile F

F 17

Professional Fiberglass Boats



S P E C S	Overall Length	: 17' / 5.18m	Number of Chambers	: 5	Shaft Length	: 20" / 50.8cm
	Overall Beam	: 8'1" / 2.46m	Person Capacity	: 15	Optional Fuel Tank	: 34 Gal / 128 Lt.
	Inside Length	: 13'1" / 4.0m	Weight	: 772lb / 350kg	RDC Design Category :C	
	Inside Beam	: 4'4" / 1.33m	Recommended HP	: 75hp / 56kw		
	Tube Diameter	: 20" / 0.50m	Maximum HP	: 90hp / 67kw		

S T A N D A R D F E A T U R E S	<ul style="list-style-type: none">Professional Grade Hand Laid Fiberglass Deep "V" HullStringer System Laminated into HullBow Locker/ SeatDiamond Shape Non - Skid DeckPlastic External Transom PlateAluminum Internal Transom PlateHeavy Duty 1670 Decitex Orca (CSM) Five Layer Coated FabricLife Line Around TubeNon - Skid (CSM) Coated Fabric on Tube's SurfacePressure Relief Valves			<ul style="list-style-type: none">4 Push Push Plastic Non-Corrosive 2 Stage Inflation ValvesDouble Solid Rub RailStainless Steel Bow Eye4 Stainless Steel Davit Lifting PointsStainless Steel Towing Rings & Tie DownsDeck Condensation PlugDeck Drain with Plug1 Front & 5 Side Orca (CSM) Fabric Handles on Tubes3 Layer Reinforced SeamsPaddle with Aluminum Shaft		
				<ul style="list-style-type: none">Paddle HoldersHand PumpMaintenance KitOwner's ManualAdditional Air Retaining Chamber Under the FloorDrain Scuppers		

O P T I O N A L F E A T U R E S	<ul style="list-style-type: none">Optional Fuel Tank 34 Gal / 128 LBow Hatch CushionBoat CoverChock SetBow Step with Fold Down Stainless Steel CleatLateral Fold Down Stainless Steel CleatRemovable Rowing Seat			<ul style="list-style-type: none">Bimini TopFiberglass ConsoleFiberglass Console with Forward SeatBench Seat with StorageTwo person Jockey SeatStainless Steel Helm Unit		

Profile F

F 19

Professional Fiberglass Boats



S P E C S	Overall Length	: 19' / 5.79m	Number of Chambers	: 5	Shaft Length	: 25" / 63.5cm
	Overall Beam	: 8'4" / 2.53m	Person Capacity	: 15	Gas Built in Tank	: 44 Gal / 167 L
	Inside Length	: 15'2" / 4.62m	Weight	: 1157lb / 526kg	RDC Design Category : C	
	Inside Beam	: 4'1" / 1.25m	Recommended HP	:115hp / 85.8kw		
	Tube Diameter	: 22" / 0.56m	Maximum HP	:150hp / 111.9kw		

S T A N D A R D	<ul style="list-style-type: none">Professional Grade Hand Laid Fiberglass Deep "V" HullStringer System Laminated into HullDiamond Shape Non-skid DeckIntegrated Marine Grade Aluminum Fuel TankPlastic External Transom PlateAluminum Internal Transom Plate2 Front & 6 Side Orca (CSM) Fabric Handles on TubesLife Line Around TubeNon - Skid (CSM) Coated Fabric on Tube's SurfacePressure Relief ValvesDouble Solid RubrailPush Push Plastic Non-Corrosive 2 Stage Inflation ValvesHeavy Duty 1670 Decitex Orca (CSM) Five Layer Coated FabricHand Pump	<ul style="list-style-type: none">Maintenance KitOwner's ManualClosed Cell Foam UpholsteryFiberglass Console with Forward Seat & CushionLeaning BolsterBow Locker/SeatConsole Front Access LidBow Step with Fold Down Stainless Steel Cleat & LED Running Lights360° LED White Light Navigation PoleLateral Fold Down Stainless Steel Cleat4 Stainless Steel Davit Lifting PointsStainless Steel Bow EyeStainless Steel Tow Rings & Tie DownsStainless Steel Console Grab Rail	<ul style="list-style-type: none">Plexiglass Windshield8 Waterproof Rocker Switches with Circuit BrakersBattery BoxBattery SwitchFuel and Water Separator FilterSending UnitAutomatic Bilge Pump 750 GPHHydraulic Steering SystemStainless Steel Steering Wheel with KnobComplete Tin Wiring & Heat Shrink Sealed Terminals4 Layer Reinforced SeamsBattery ChargerStainless Steel Gas Springs2 Deck Drain Scuppers & Hull Drain with Plus


O P T I O N A L	<ul style="list-style-type: none">Stainless Steel Light ArchAluminum T--TopBimini Top with Stainless Steel TubingChock SetBoat CoverConsole CoverLifting HarnessTeak Floor	<ul style="list-style-type: none">CD/Radio SystemCompassGPSVHF PackageRod HoldersTowing PostEngine Guard



Profile F

F 21

Professional Fiberglass Boats

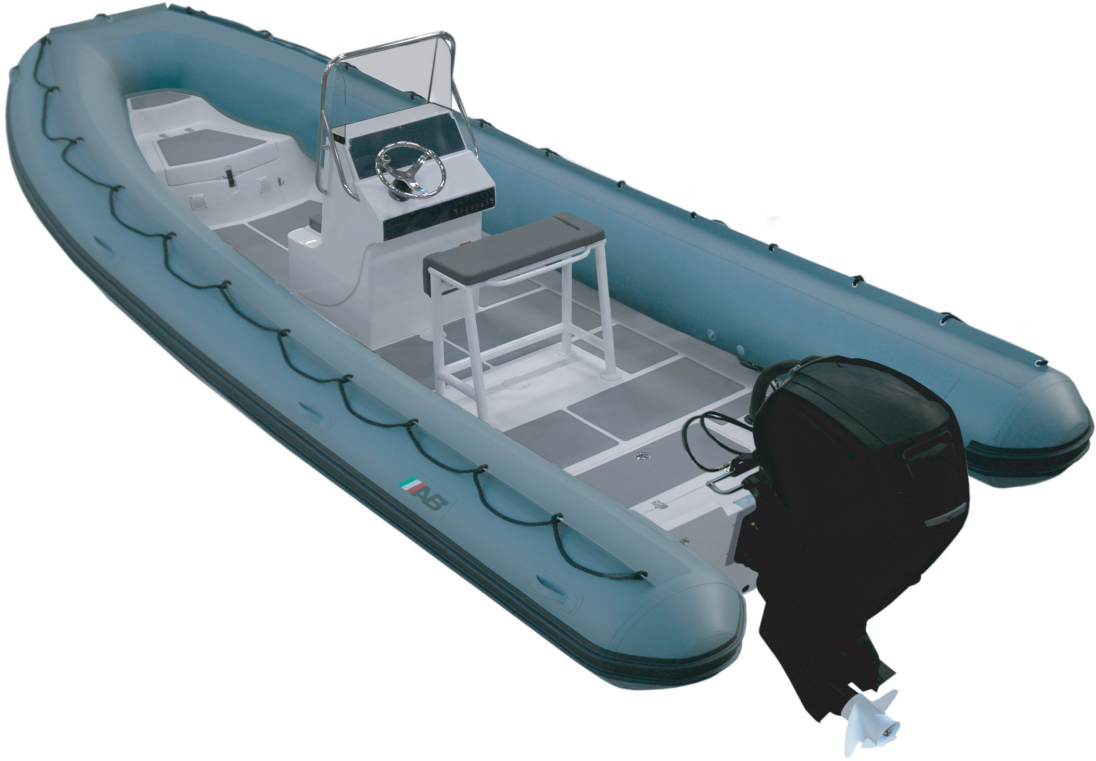

SPECS

Overall Length	: 21'4/ 6.50m	Number of Chambers	: 5	Shaft Length	: 25" / 63.5cm
Overall Beam	: 8'10"/ 2.70m	Person Capacity	: 20	Gas Built in Tank	: 63Gal / 240 L
Inside Length	: 17'3"/ 5.25m	Weight	: 1642lb / 745kg	RDC Design Category	: C
Inside Beam	: 4'9"/ 1.44m	Recommended HP	:150hp / 111.9kw		
Tube Diameter	: 22"/ 0.56m	Maximum HP	:225hp / 167.8kw		

STANDARD

- Professional Grade Hand Laid Fiberglass Deep "V" Hull
 - Stringer System Laminated into Hull
 - Non - Skid Rubber Floor Panels
 - Integrated Marine Grade Aluminum Fuel Tank
 - Plastic External Transom Plate
 - Aluminum Internal Transom Plate
 - 2 Front & 6 Side Orca (CSM) Fabric Handles on Tubes
 - Life Line Around Tube
 - Non - Skid (CSM) Coated Fabric on Tube's Surface
 - Pressure Relief Valves
 - Double Solid Rubrail
 - Push Push Plastic Non-Corrosive 2 Stage Inflation Valves
 - Heavy Duty 1670 Decitex Orca (CSM) Five Layer Coated Fabric
 - Hand Pump
- Maintenance Kit
 - Owner's Manual
 - Closed Cell Foam Upholstery
 - Fiberglass Console with Forward Seat & Cushion
 - Leaning Bolster
 - Bow Locker/Seat
 - Console Front Access Lid
 - Bow Step with Fold Down Stainless Steel Cleat & LED Running Lights
 - 360° LED White Light Navigation Pole
 - Lateral Fold Down Stainless Steel Cleat
 - Stainless Steel Bow Eye
 - Stainless Steel Tow Rings & Tie Downs
 - Stainless Steel Console Grab Rail
 - Plexiglass Windshield
- 8 Waterproof Rocker Switches with Circuit Brakers
 - Battery Box
 - Battery Switch
 - Fuel and Water Separator Filter
 - Sending Unit
 - Automatic Bilge Pump 750 GPH
 - Hydraulic Steering System
 - Stainless Steel Steering Wheel with Knob
 - Complete Tin Wiring & Heat Shrink Sealed Terminals
 - 4 Layer Reinforced Seams
 - Battery Charger
 - Stainless Steel Gas Springs
 - 2 Deck Drain Scuppers & Hull Drain with Plus

OPTIONAL

- Stainless Steel Light Arch
 - Aluminum T--Top
 - Bimini Top with Stainless Steel Tubing
 - Chock Set
 - Boat Cover
 - Console Cover
 - Lifting Harness
 - Teak Floor
- CD/Radio System
 - Compass
 - GPS
 - VHF Package
 - Rod Holders
 - Towing Post
 - Aluminum Engin Bracket



Profile F

F 24

Professional Fiberglass Boats



S P E C S	Overall Length	: 24' / 7.31m	Number of Chambers	: 6	Shaft Length	: 25" / 63.5cm
	Overall Beam	: 9'3" / 2.82m	Person Capacity	: 20	Gas Built in Tank	: 65Gal / 246 L
	Inside Length	: 19'3" / 5.87m	Weight	: 1980lb / 900kg	RDC Design Category : B	
	Inside Beam	: 5'4" / 1.64m	Recommended HP	: 150hp / 111.9kw		
	Tube Diameter	: 24" / 0.61m	Maximum HP	: 250hp / 186.5kw		

S T A N D A R D	<ul style="list-style-type: none">Professional Grade Hand Laid Fiberglass Deep "V" HullStringer System Laminated into HullNon - Skid Rubber Floor PanelsIntegrated Marine Grade Aluminum Fuel TankPlastic External Transom PlateAluminum Internal Transom Plate2 Front & 6 Side Orca (CSM) Fabric Handles on TubesLife Line Around TubeNon - Skid (CSM) Coated Fabric on Tube's SurfacePressure Relief ValvesDouble Solid RubrailPush Push Plastic Non-Corrosive 2 Stage Inflation ValvesHeavy Duty 1670 Decitex Orca (CSM) Five Layer Coated FabricHand Pump	<ul style="list-style-type: none">Maintenance KitOwner's ManualClosed Cell Foam UpholsteryFiberglass Console with Forward Seat & CushionLeaning BolsterBow Locker/SeatConsole Front Access LidBow Step with Fold Down Stainless Steel Cleat & LED Running Lights360° LED White Light Navigation PoleLateral Fold Down Stainless Steel CleatStainless Steel Bow EyeStainless Steel Tow Rings & Tie DownsStainless Steel Console Grab RailPlexiglass Windshield	<ul style="list-style-type: none">8 Waterproof Rocker Switches with Circuit BrakersBattery BoxBattery SwitchFuel and Water Separator FilterSending Unit2 x Automatic Bilge Pump 1100 GPHHydraulic Steering SystemStainless Steel Steering Wheel with KnobComplete Tin Wiring & Heat Shrink Sealed Terminals4 Layer Reinforced SeamsBattery ChargerStainless Steel Gas Springs2 Deck Drain Scuppers & Hull Drain with Plus

O P T I O N A L	<ul style="list-style-type: none">Stainless Steel Light ArchAluminum T--TopBimini Top with Stainless Steel TubingChock SetBoat CoverConsole CoverLifting HarnessTeak Floor	<ul style="list-style-type: none">CD/Radio SystemCompassGPSVHF PackageRod HoldersTowing PostAluminum Engin Bracket

Profile F

F 28

Professional Fiberglass Boats



S P E C S	Overall Length	: 27' / 8.23m	Number of Chambers	: 6	Shaft Length	: 30" / 76.2cm
	Overall Beam	: 10'1" / 3.07m	Person Capacity	: 25	Gas Built in Tank	: 189 Gal / 715 L
	Inside Length	: 22'11" / 6.99m	Weight	: 2853lb / 1297kg	RDC Design Category : B	
	Inside Beam	: 6'4" / 1.93m	Recommended HP	:250hp / 186.5kw		
	Tube Diameter	: 24" / 0.61m	Maximum HP	:500hp / 372.9kw		

S T A N D A R D	<ul style="list-style-type: none">Professional Grade Hand Laid Fiberglass Deep "V" HullStringer System Laminated into HullDiamond Shape Non-skid DeckIntegrated Marine Grade Aluminum Fuel TankPlastic External Transom PlateAluminum Internal Transom Plate2 Front & 8 Side Orca (CSM) Fabric Handles on TubesLife Line Around TubeNon - Skid (CSM) Coated Fabric on Tube's SurfacePressure Relief ValvesDouble Solid RubrailPush Push Plastic Non-Corrosive 2 Stage Inflation ValvesHeavy Duty 1670 Decitex Orca (CSM) Five Layer Coated FabricHand Pump	<ul style="list-style-type: none">Maintenance KitOwner's ManualClosed Cell Foam UpholsteryFiberglass Console with Forward Seat & CushionLeaning BolsterBow Locker/SeatConsole Front Access LidBow Step with Fold Down Stainless Steel Cleat & LED Running Lights360° LED White Light Navigation PoleLateral Fold Down Stainless Steel CleatStainless Steel Bow EyeStainless Steel Tow Rings & Tie DownsStainless Steel Console Grab RailPlexiglass Windshield	<ul style="list-style-type: none">8 Waterproof Rocker Switches with Circuit BrakersBattery BoxBattery SwitchFuel and Water Separator FilterSending UnitAutomatic Bilge Pump 750 GPHHydraulic Steering SystemStainless Steel Steering Wheel with KnobComplete Tin Wiring & Heat Shrink Sealed Terminals4 Layer Reinforced SeamsBattery ChargerStainless Steel Gas Springs2 Deck Drain Scuppers & Hull Drain with Plus

O P T I O N A L	<ul style="list-style-type: none">Stainless Steel Light ArchAluminum T--TopBimini Top with Stainless Steel TubingChock SetBoat CoverConsole CoverLifting HarnessTeak Floor	<ul style="list-style-type: none">CD/Radio SystemCompassGPSVHF PackageRod HoldersTowing PostAluminum Engine Bracket