


Profile

A 11-S SUPERLIGHT

Professional Shallow Water
Aluminum Boats

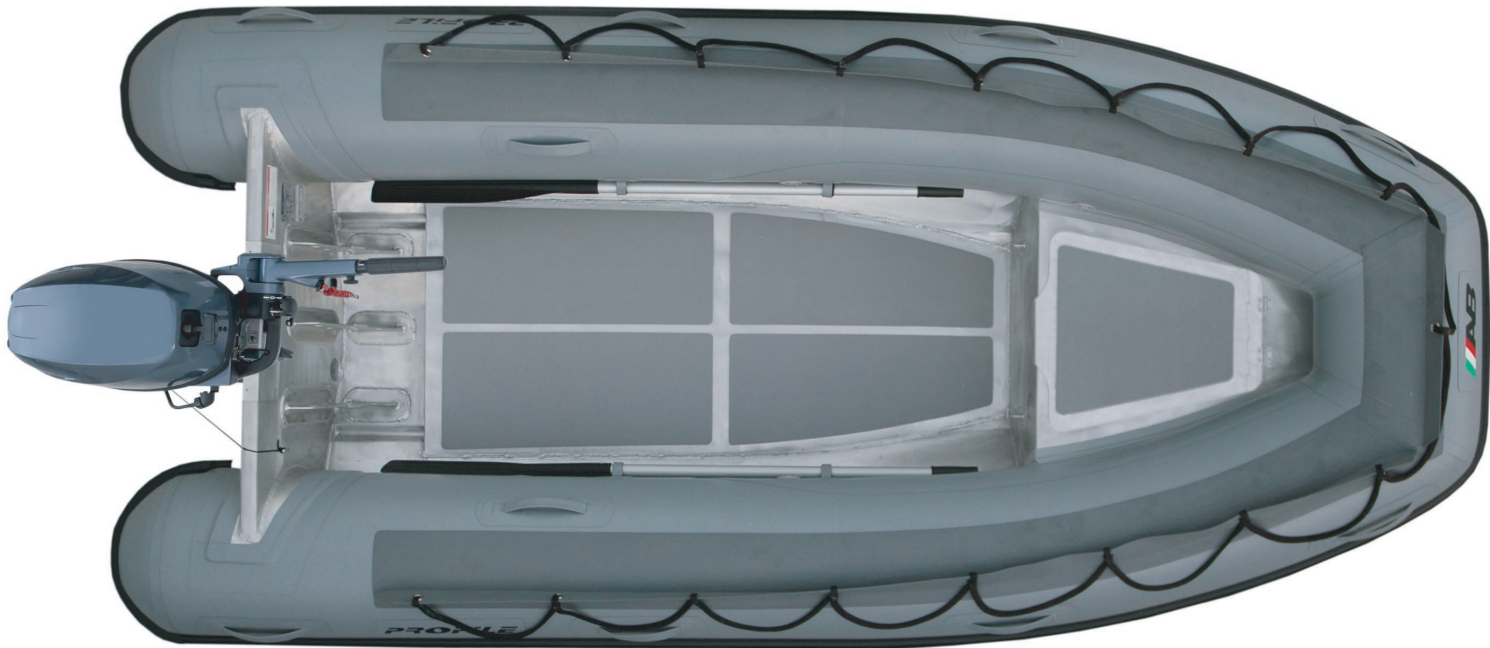

SPECS

Overall Length	: 11'6" / 3.50m	Number of Chambers	: 3	Maximum HP	: 30hp / 22.4kw
Overall Beam	: 5'7" / 1.70m	Person Capacity	: 6	Shaft Length	: 15" / 38.1cm
Inside Length	: 8'6" / 2.60m	Weight	: 227lb / 103kg	RDC Design Category	: C
Inside Beam	: 2'8" / 0.81m	Weight with Bow Locker	: 242lb / 110kg		
Tube Diameter	: 17" / 0.43m	Recommended HP	: 20hp / 14.9kw		

STANDARD
FEATURES

- Marine Grade Aluminum Hull - Shallow Water Version
 - Stringer System Welded Under Aluminum Deck
 - Life Line Around Tube
 - Non - Skid(CSM) Coated Fabric on Tube's Surface
 - Pressure Relief Valves
 - Drain Scuppers
 - Heavy Duty Transom Knee
 - Non - Skid Rubber Floor Panels
 - Plastic External Transom Plate
 - Aluminum Internal Transom Plate
- Aluminum Bow Eye
 - 4 Aluminum Davit Lifting Points
 - Aluminum Transom Tie Down & Towing Rings
 - Aluminum Bow Tie Down & Towing Rings
 - Deck Drain with Plug
 - Heavy Duty 1670 Decitex Orca(CSM) Five Layer Coated Fabric
 - Double Solid Rub Rails
 - Push Push Plastic Non-Corrosive 2 Stage Inflation Valves
 - 1 Front & 4 Side Orca(CSM) Fabric Handles on Tubes
- Paddles with Aluminum Shaft
 - Paddle Holders
 - Hand Pump
 - Maintenance Kit
 - Owner's Manual
 - 3 Layer Reinforced Seams
 - Rubber Protector on Full Length of Keel

OPTIONAL
FEATURES


- Bow Locker Storage with Vent to Fit a 6 Gal Portable Fuel Tank
 - Portable 6 Gal Fuel Tank Installed in Bow Locker with Fittings
 - Tube Chaps
 - Boat Cover
 - Chock Set
 - Bow Step with Fold Down Stainless Steel Cleat
 - Lateral Fold Down Stainless Steel Cleat
 - Removable Rowing Seat
 - Fiberglass Console with Forward Seat
 - Customized Aluminum Consoles & Seats Upon Request
- Fiberglass Console
 - One Person Jockey Seat
 - Two Person Jockey Seat
 - Stainless Steel Helm Uni
 - Aluminum Console
 - Aluminum Lean On



Profile

A 12-S SUPERLIGHT

Professional Shallow Water Aluminum Boats

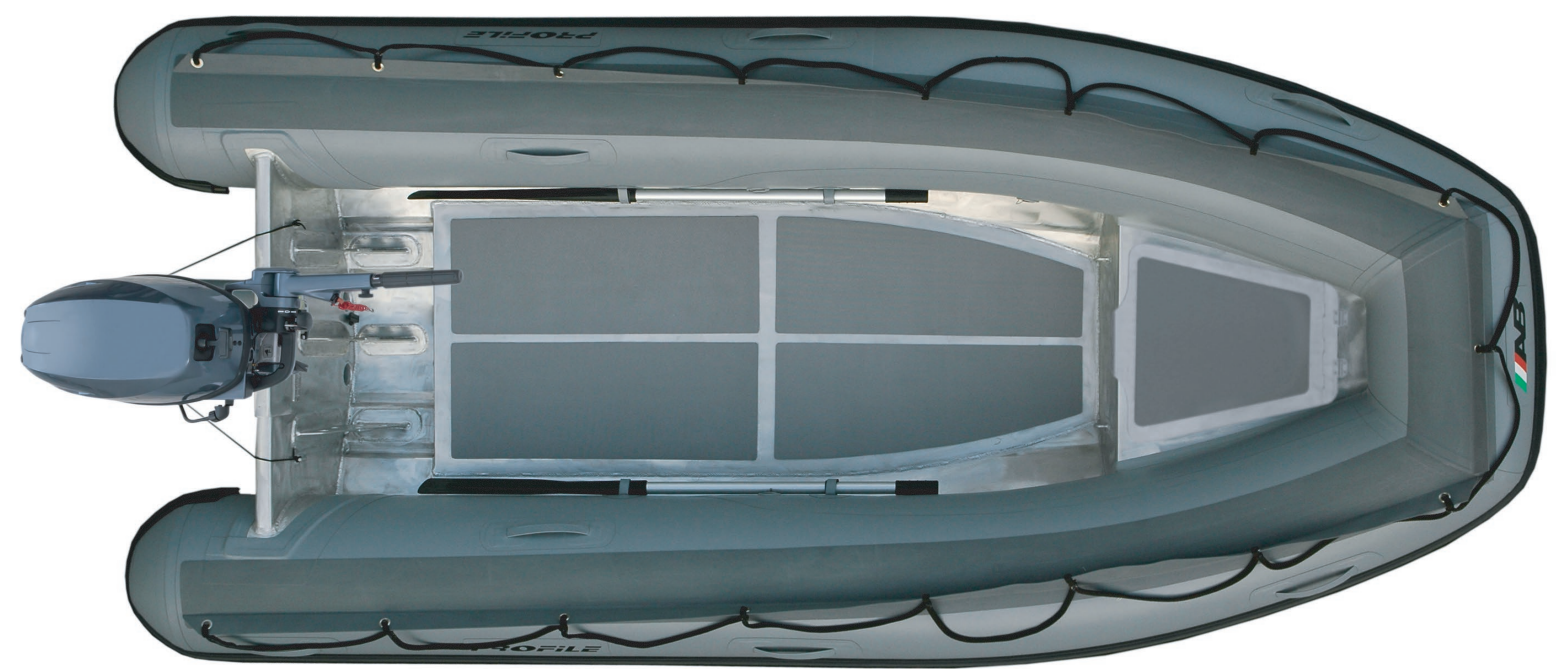

S P E C S	Overall Length	: 12' / 3.66m	Number of Chambers	: 3	Maximum HP	: 30hp / 22.4kw
	Overall Beam	: 5'11" / 1.8m	Person Capacity	: 6	Shaft Length	: 15" / 38.1cm
	Inside Length	: 8'10" / 2.70m	Weight	: 242lb / 110kg	RDC Design Category : C	
	Inside Beam	: 2'10" / 0.86m	Weight with Bow Locker	: 257lb / 117kg		
	Tube Diameter	: 18" / 0.46m	Recommended HP	: 25hp / 18.7kw		


S T A N D A R D F E A T U R E S	<ul style="list-style-type: none">■ Marine Grade Aluminum Hull - Shallow Water Version■ Stringer System Welded Under Aluminum Deck■ Life Line Around Tube■ Non - Skid(CSM) Coated Fabric on Tube's Surface■ Pressure Relief Valves■ Drain Scuppers■ Heavy Duty Transom Knee■ Non - Skid Rubber Floor Panels■ Plastic External Transom Plate■ Aluminum Internal Transom Plate			<ul style="list-style-type: none">■ Aluminum Bow Eye■ 4 Aluminum Davit Lifting Points■ Aluminum Transom Tie Down & Towing Rings■ Aluminum Bow Tie Down & Towing Rings■ Deck Drain with Plug■ Heavy Duty 1670 Decitex Orca(CSM) Five Layer Coated Fabric■ Double Solid Rub Rails■ Push Push Plastic Non-Corrosive 2 Stage Inflation Valves■ 1 Front & 4 Side Orca(CSM) Fabric Handles on Tubes		
				<ul style="list-style-type: none">■ Paddles with Aluminum Shaft■ Paddle Holders■ Hand Pump■ Maintenance Kit■ Owner's Manual■ 3 Layer Reinforced Seams■ Rubber Protector on Full Length of Keel		

O P T I O N A L F E A T U R E S	<ul style="list-style-type: none">■ Bow Locker Storage with Vent to Fit a 6 Gal Portable Fuel Tank■ Portable 6 Gal Fuel Tank Installed in Bow Locker with Fittings■ Tube Chaps■ Boat Cover■ Chock Set■ Bow Step with Fold Down Stainless Steel Cleat■ Lateral Fold Down Stainless Steel Cleat■ Removable Rowing Seat■ Fiberglass Console with Forward Seat■ Customized Aluminum Consoles & Seats Upon Request			<ul style="list-style-type: none">■ Fiberglass Console■ One Person Jockey Seat■ Two Person Jockey Seat■ Stainless Steel Helm Uni■ Aluminum Console■ Aluminum Lean On		

Profile

A 13-S SUPERLIGHT

Professional Shallow Water
Aluminum Boats

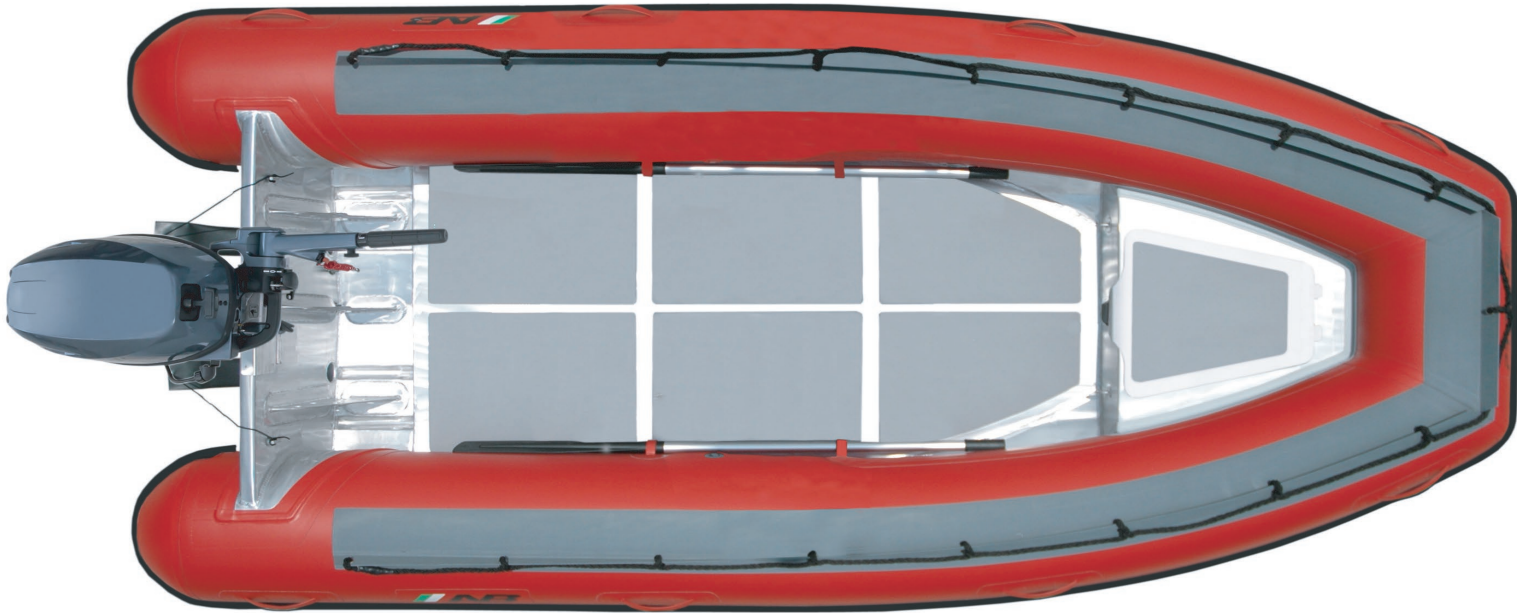

S P E C S	Overall Length	: 13' / 3.96m	Number of Chambers	: 3	Maximum HP	: 40hp / 29.8kw
	Overall Beam	: 6'5" / 1.96m	Person Capacity	: 7	Shaft Length	: 20" / 50.8cm
	Inside Length	: 9'10" / 3.00m	Weight	: 282lb/128kg	RDC Design Category : C	
	Inside Beam	: 3'3" / 0.99m	Weight with Bow Locker	: 297lb/ 135kg		
	Tube Diameter	: 18" / 0.46m	Recommended HP	: 30hp /22.4kw		

STANDARD FEATURES

- Marine Grade Aluminum Hull - Shallow Water Version
- Stringer System Welded Under Aluminum Deck
- Life Line Around Tube
- Non - Skid(CSM) Coated Fabric on Tube's Surface
- Pressure Relief Valves
- Drain Scuppers
- Heavy Duty Transom Knee
- Non - Skid Rubber Floor Panels
- Plastic External Transom Plate
- Aluminum Internal Transom Plate

- Aluminum Bow Eye
- 4 Aluminum Davit Lifting Points
- Aluminum Transom Tie Down & Towing Rings
- Aluminum Bow Tie Down & Towing Rings
- Deck Drain with Plug
- Heavy Duty 1670 Decitex Orca(CSM) Five Layer Coated Fabric
- Double Solid Rub Rails
- Push Push Plastic Non-Corrosive 2 Stage Inflation Valves
- 1 Front & 4 Side Orca(CSM) Fabric Handles on Tubes

- Paddles with Aluminum Shaft
- Paddle Holders
- Hand Pump
- Maintenance Kit
- Owner's Manual
- 3 Layer Reinforced Seams
- Rubber Protector on Full Length of Keel

OPTIONAL
FEATURES

- Bow Locker Storage with Vent to Fit a 6 Gal Portable Fuel Tank
- Portable 6 Gal Fuel Tank Installed in Bow Locker with Fittings
- Tube Chaps
- Boat Cover
- Chock Set
- Bow Step with Fold Down Stainless Steel Cleat
- Lateral Fold Down Stainless Steel Cleat
- Removable Rowing Seat
- Fiberglass Console with Forward Seat
- Customized Aluminum Consoles & Seats Upon Request

- Fiberglass Console
- One Person Jockey Seat
- Two Person Jockey Seat
- Stainless Steel Helm Uni
- Aluminum Console
- Aluminum Lean On

Profile

A 14-S SUPERLIGHT

Professional Shallow Water Aluminum Boats



S P E C S	Overall Length	: 14' / 4.27m	Number of Chambers	: 4	Maximum HP	: 50hp / 37.3kw
	Overall Beam	: 6'5" / 1.96m	Person Capacity	: 8	Shaft Length	: 20" / 50.8cm
	Inside Length	: 10'10" / 3.30m	Weight	: 317lb / 144kg	RDC Design Category : C	
	Inside Beam	: 3'3" / 0.99m	Weight with Bow Locker : 335lb / 152kg			
	Tube Diameter	: 19" / 0.48m	Recommended HP : 40hp / 29.8kw			

S T A N D A R D F E A T U R E S	<ul style="list-style-type: none">■ Marine Grade Aluminum Hull - Shallow Water Version■ Stringer System Welded Under Aluminum Deck■ Life Line Around Tube■ Non - Skid(CSM) Coated Fabric on Tube's Surface■ Pressure Relief Valves■ Drain Scuppers■ Heavy Duty Transom Knee■ Non - Skid Rubber Floor Panels■ Plastic External Transom Plate■ Aluminum Internal Transom Plate			<ul style="list-style-type: none">■ Aluminum Bow Eye■ 4 Aluminum Davit Lifting Points■ Aluminum Transom Tie Down & Towing Rings■ Aluminum Bow Tie Down & Towing Rings■ Deck Drain with Plug■ Heavy Duty 1670 Decitex Orca(CSM) Five Layer Coated Fabric■ Double Solid Rub Rails■ Push Push Plastic Non-Corrosive 2 Stage Inflation Valves■ 1 Front & 4 Side Orca(CSM) Fabric Handles on Tubes		
				<ul style="list-style-type: none">■ Paddles with Aluminum Shaft■ Paddle Holders■ Hand Pump■ Maintenance Kit■ Owner's Manual■ 3 Layer Reinforced Seams■ Rubber Protector on Full Length of Keel		

O P T I O N A L F E A T U R E S	<ul style="list-style-type: none">■ Bow Locker Storage with Vent to Fit a 6 Gal Portable Fuel Tank■ Portable 6 Gal Fuel Tank Installed in Bow Locker with Fittings■ Tube Chaps■ Boat Cover■ Chock Set■ Bow Step with Fold Down Stainless Steel Cleat■ Lateral Fold Down Stainless Steel Cleat■ Removable Rowing Seat■ Fiberglass Console with Forward Seat■ Customized Aluminum Consoles & Seats Upon Request			<ul style="list-style-type: none">■ Fiberglass Console■ One Person Jockey Seat■ Two Person Jockey Seat■ Stainless Steel Helm Uni■ Aluminum Console■ Aluminum Lean On		

Profile

A 16-S SUPERLIGHT

Professional Shallow Water Aluminum Boats



S P E C S	Overall Length	: 16' / 4.88m	Number of Chambers	: 5	Maximum HP	: 60hp / 44.8kw
	Overall Beam	: 7' / 2.14m	Person Capacity	: 10	Shaft Length	: 20" / 50.8cm
	Inside Length	: 13'2" / 4.01m	Weight	: 480lb / 218kg	RDC Design Category	: C
	Inside Beam	: 3'6" / 1.08m	Weight with Bow Locker	: 500lb / 227kg		
	Tube Diameter	: 21" / 0.53m	Recommended HP	: 50hp / 37.3kw		

S T A N D A R D S F E A T U R E S	<ul style="list-style-type: none">Marine Grade Aluminum Hull - Shallow Water VersionStringer System Welded Under Aluminum DeckLife Line Around TubeNon - Skid(CSM) Coated Fabric on Tube's SurfacePressure Relief ValvesDrain ScuppersHeavy Duty Transom KneeNon - Skid Rubber Floor PanelsPlastic External Transom PlateAluminum Internal Transom Plate	<ul style="list-style-type: none">Aluminum Bow Eye4 Aluminum Davit Lifting PointsAluminum Transom Tie Down & Towing RingsAluminum Bow Tie Down & Towing RingsDeck Drain with PlugHeavy Duty 1670 Decitex Orca(CSM) Five Layer Coated FabricDouble Solid Rub RailsPush Push Plastic Non-Corrosive 2 Stage Inflation Valves1 Front & 5 Side Orca(CSM) Fabric Handles on Tubes	<ul style="list-style-type: none">Paddles with Aluminum ShaftPaddle HoldersHand PumpMaintenance KitOwner's Manual3 Layer Reinforced SeamsRubber Protector on Full Length of Keel

O P T I O N A L F E A T U R E S	<ul style="list-style-type: none">Bow Locker Storage with Vent to Fit a 6 Gal Portable Fuel TankPortable 6 Gal Fuel Tank Installed in Bow Locker with FittingsTube ChapsBoat CoverChock SetBow Step with Fold Down Stainless Steel CleatLateral Fold Down Stainless Steel CleatRemovable Rowing SeatFiberglass Console with Forward SeatCustomized Aluminum Consoles & Seats Upon Request	<ul style="list-style-type: none">Fiberglass ConsoleOne Person Jockey SeatTwo Person Jockey SeatStainless Steel Helm UniAluminum ConsoleAluminum Lean On