


Profile

A 11-S SUPERLIGHT

Professional Shallow Water Aluminum Boats

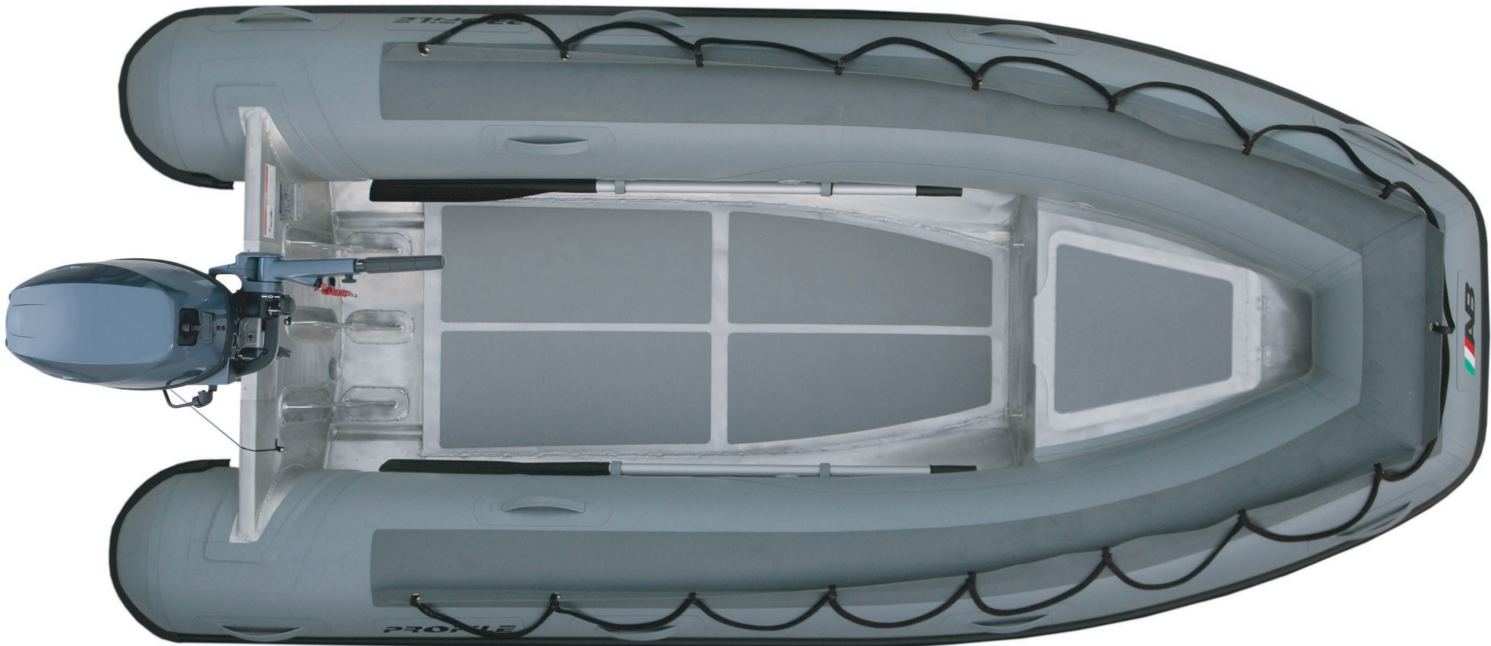

S P E C S	Overall Length	: 11'6" / 3.50m	Number of Chambers	: 3	Maximum HP	: 30hp / 22.4kw
	Overall Beam	: 5'7" / 1.70m	Person Capacity	: 6	Shaft Length	: 15" / 38.1cm
	Inside Length	: 8'6" / 2.60m	Weight	: 227lb / 103kg	RDC Design Category : C	
	Inside Beam	: 2'8" / 0.81m	Weight with Bow Locker	: 242lb / 110kg		
	Tube Diameter	: 17" / 0.43m	Recommended HP	: 20hp / 14.9kw		

S T A N D A R D F E A T U R E S	<ul style="list-style-type: none">■ Marine Grade Aluminum Hull - Shallow Water Version■ Stringer System Welded Under Aluminum Deck■ Life Line Around Tube■ Non - Skid(CSM) Coated Fabric on Tube's Surface■ Pressure Relief Valves■ Drain Scuppers■ Heavy Duty Transom Knee■ Non - Skid Rubber Floor Panels■ Plastic External Transom Plate■ Aluminum Internal Transom Plate			<ul style="list-style-type: none">■ Aluminum Bow Eye■ 4 Aluminum Davit Lifting Points■ Aluminum Transom Tie Down & Towing Rings■ Aluminum Bow Tie Down & Towing Rings■ Deck Drain with Plug■ Heavy Duty 1670 Decitex Orca(CSM) Five Layer Coated Fabric■ Double Solid Rub Rails■ Push Push Plastic Non-Corrosive 2 Stage Inflation Valves■ 1 Front & 4 Side Orca(CSM) Fabric Handles on Tubes		
				<ul style="list-style-type: none">■ Paddles with Aluminum Shaft■ Paddle Holders■ Hand Pump■ Maintenance Kit■ Owner's Manual■ 3 Layer Reinforced Seams■ Rubber Protector on Full Length of Keel		

O P T I O N A L F E A T U R E S	<ul style="list-style-type: none">■ Bow Locker Storage with Vent to Fit a 6 Gal Portable Fuel Tank■ Portable 6 Gal Fuel Tank Installed in Bow Locker with Fittings■ Tube Chaps■ Boat Cover■ Chock Set■ Bow Step with Fold Down Stainless Steel Cleat■ Lateral Fold Down Stainless Steel Cleat■ Removable Rowing Seat■ Fiberglass Console with Forward Seat■ Customized Aluminum Consoles & Seats Upon Request			<ul style="list-style-type: none">■ Fiberglass Console■ One Person Jockey Seat■ Two Person Jockey Seat■ Stainless Steel Helm Uni■ Aluminum Console■ Aluminum Lean On		