



ventus

8VL

Lightweight Fiberglass Tender

OPTIONAL BOW STEP



SPICES

Overall Length	: 8'6" / 2.60m	Number of Chambers	: 3 + 1	Shaft Length	: 15" / 38.1cm
Overall Beam	: 5'6" / 1.68m	Person Capacity	: 4	RDC Design Category : C	
Inside Length	: 5'10" / 1.79m	Weight	: 95lb / 43kg		
Inside Beam	: 2'4" / 0.72m	Recommended HP	: 8hp / 6kw		
Tube Diameter	: 16" / 0.40m	Maximum HP	: 10hp / 7.5kw		

STANDARDS FEATURES

- | | | |
|---|--|--|
| ■ Hand Laid Fiberglass Deep “V” Hull | ■ Deck Condensation Plug | ■ Oarlock Bases |
| ■ Stringer System Laminated into Hull | ■ Orca(CSM) Five Layer Coated Fabric | ■ Telescopic Oars with Aluminum Shaft |
| ■ Non - Skid Rubber Floor Pannels | ■ Raised Single Rub Rail | ■ Paddle Holders |
| ■ Plastic External Transom Plate | ■ Push Push Plastic Non-Corrosive 2 Stage Inflation Valves | ■ Hand Pump |
| ■ Aluminum Internal Transom Plate with Security Lip | ■ 1 Front & 2 Side Orca(CSM) Fabric Handles on Tubes | ■ Maintenance Kit |
| ■ Stainless Steel Bow Eye | ■ 2 Inside Bow Sets of 2 Orca(CSM) Fabric Handles on Tubes | ■ Owner's Manual |
| ■ Stainless Steel 3 Davit Lifting Points | ■ 2 Inside Stern Single Orca(CSM) Fabric Handles on Tubes | ■ Additional Air Retaining Chamber Under the Floor |
| ■ Inner Hull Drain with Plug | ■ Removable Rowing Seat | ■ 3 Layer Reinforced Seams |

OPTIONALS

- Tube Chaps
- Boat Cover
- Chock Set
- Bow Step with Fold Down Stainless Steel Cleat
- Lateral Fold Down Stainless Steel Cleat



www.abinfatables.com

ventus

9VL

Lightweight Fiberglass Tender



S P E C S	Overall Length	: 9'6" / 2.90m	Number of Chambers	: 3 + 1	Shaft Length	: 15" / 38.1cm
	Overall Beam	: 5'7" / 1.72m	Person Capacity	: 4	RDC Design Category	: C
	Inside Length	: 6'9" / 2.06m	Weight	: 106lb / 48kg		
	Inside Beam	: 2'8" / 0.81m	Recommended HP	: 9.9hp / 7.4kw		
	Tube Diameter	: 17" / 0.43m	Maximum HP	: 15hp / 11.2kw		

S T A N D A R D F E A T U R E S	<ul style="list-style-type: none">■ Hand Laid Fiberglass Deep "V" Hull■ Stringer System Laminated into Hull■ Non - Skid Rubber Floor Pannels■ Plastic External Transom Plate■ Aluminum Internal Transom Plate with Security Lip■ Stainless Steel Bow Eye■ Stainless Steel 3 Davit Lifting Points■ Inner Hull Drain with Plug	<ul style="list-style-type: none">■ Deck Condensation Plug■ Orca(CSM) Five Layer Coated Fabric■ Raised Single Rub Rail■ Push Push Plastic Non-Corrosive 2 Stage Inflation Valves■ 1 Front & 2 Side Orca(CSM) Fabric Handles on Tubes■ 2 Inside Bow Sets of 2 Orca(CSM) Fabric Handles on Tubes■ 2 Inside Stern Single Orca(CSM) Fabric Handles on Tubes■ Removable Rowing Seat	<ul style="list-style-type: none">■ Oarlock Bases■ Telescopic Oars with Aluminum Shaft■ Paddle Holders■ Hand Pump■ Maintenance Kit■ Owner's Manual■ Additional Air Retaining Chamber Under the Floor■ 3 Layer Reinforced Seams

O P T I O N A L F E A T U R E S	<ul style="list-style-type: none">■ Tube Chaps■ Boat Cover■ Chock Set■ Bow Step with Fold Down Stainless Steel Cleat	<ul style="list-style-type: none">■ Lateral Fold Down Stainless Steel Cleat■ Removable Stern Seat

ventus

10VL

Lightweight Fiberglass Tender



SPECS	Overall Length	: 10'6" / 3.19m	Number of Chambers	: 3 + 1	Shaft Length	: 15" / 38.1cm
	Overall Beam	: 5'7" / 1.72m	Person Capacity	: 5	RDC Design Category	: C
	Inside Length	: 7'7" / 2.31m	Weight	: 123lb / 56kg		
	Inside Beam	: 2'8" / 0.81m	Recommended HP	: 15hp / 11.2kw		
	Tube Diameter	: 17" / 0.43m	Maximum HP	: 25hp / 18.7kw		

STANDARD FEATURES	<ul style="list-style-type: none">■ Hand Laid Fiberglass Deep "V" Hull■ Stringer System Laminated into Hull■ Non - Skid Rubber Floor Pannels■ Plastic External Transom Plate■ Aluminum Internal Transom Plate with Security Lip■ Stainless Steel Bow Eye■ Stainless Steel 3 Davit Lifting Points■ Inner Hull Drain with Plug			<ul style="list-style-type: none">■ Deck Condensation Plug■ Orca(CSM) Five Layer Coated Fabric■ Raised Single Rub Rail■ Push Push Plastic Non-Corrosive 2 Stage Inflation Valves■ 1 Front & 2 Side Orca(CSM) Fabric Handles on Tubes■ 2 Inside Bow Sets of 2 Orca(CSM) Fabric Handles on Tubes■ 2 Inside Stern Set of 2 Orca(CSM) Fabric Handles on Tubes■ Removable Rowing Seat		
				<ul style="list-style-type: none">■ Oarlock Bases■ Telescopic Oars with Aluminum Shaft■ Paddle Holders■ Hand Pump■ Maintenance Kit■ Owner's Manual■ Additional Air Retaining Chamber Under the Floor■ 3 Layer Reinforced Seams		

OPTIONAL FEATURES	<ul style="list-style-type: none">■ Tube Chaps■ Boat Cover■ Chock Set■ Bow Step with Fold Down Stainless Steel Cleat			<ul style="list-style-type: none">■ Lateral Fold Down Stainless Steel Cleat■ Removable Stern Seat		




ventus

12VL

Lightweight Fiberglass Tender

OPTIONAL BOW STEP

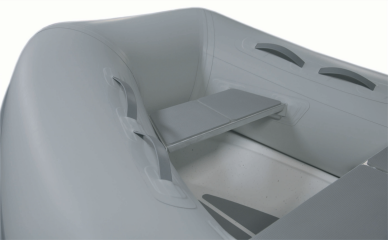

SPECS

Overall Length	: 12' / 3.66m	Number of Chambers	: 3 + 1	Shaft Length	: 15" / 38.1cm
Overall Beam	: 5'11" / 1.77m	Person Capacity	: 6	RDC Design Category	: C
Inside Length	: 8'9" / 2.67m	Weight	: 156lb / 71kg		
Inside Beam	: 2'9" / 0.84m	Recommended HP	: 20hp / 14.9kw		
Tube Diameter	: 18" / 0.46m	Maximum HP	: 30hp / 22.4kw		

STANDARDS
FEATURES

- Hand Laid Fiberglass Deep "V" Hull
 - Stringer System Laminated into Hull
 - Non - Skid Rubber Floor Pannels
 - Plastic External Transom Plate
 - Aluminum Internal Transom Plate with Security Lip
 - Stainless Steel Bow Eye
 - Stainless Steel 3 Davit Lifting Points
 - Inner Hull Drain with Plug
- Deck Condensation Plug
 - Orca(CSM) Five - Layer Coated Fabric
 - Raised Single Rub Rail
 - Push Push Plastic Non-Corrosive 2 Stage Inflation Valves
 - 1 Front & 2 Side Orca(CSM) Fabric Handles on Tubes
 - 2 Inside Bow Sets of 2 Orca(CSM) Fabric Handles on Tubes
 - 2 Inside Stern Single Orca(CSM) Fabric Handles on Tubes
 - Removable Stern Seat
- Paddles with Aluminum Shaft
 - Paddle Holders
 - Hand Pump
 - Maintenance Kit
 - Owner's Manual
 - Additional Air Retaining Chamber Under the Floor
 - 3 Layer Reinforced Seams

OPTIONAL
FEATURES

- Tube Chaps
 - Boat Cover
 - Chock Set
 - Bow Step with Fold Down Stainless Steel Cleat
- Lateral Fold Down Stainless Steel Cleat
 - Removable Rowing Seat

