




STANDARD FEATURES

- Marine Grade Aluminum Hulls
- Bow Eye
- Drain Scuppers
- Pressure Relief Valves
- Solid Double Rub Rail
- Tow Rings
- 3-4 Aluminum Lifting Points
- Non-Skid Orca (CSM) Fabric On Top of Tube
- SEADEK® EVA FOAM NON-SKID FLOOR
- 4 Layer Reinforced Seams
- Heavy Duty 1670 Decitex
- Orca (CSM) Coated Fabric
- Lifeline Around Tube
- Hand Pump
- Maintenance Kit
- Owner's Manual

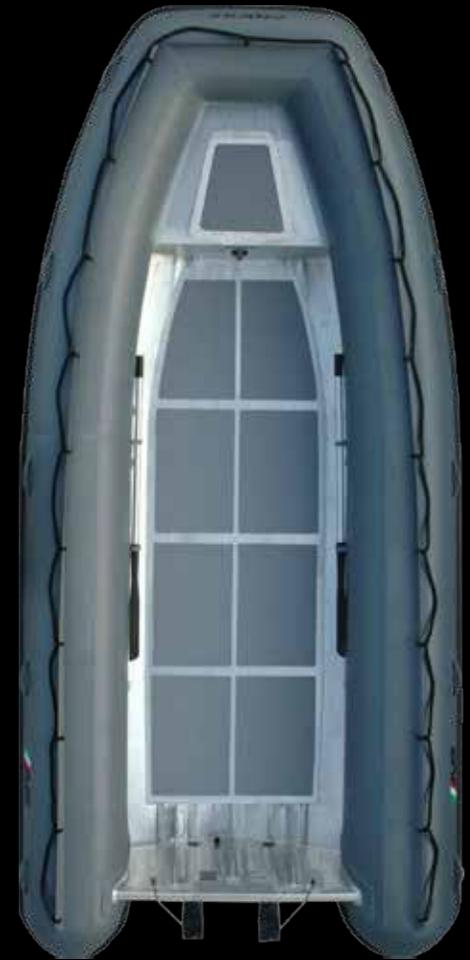

OPTIONAL FEATURES

- Bow Locker/Seat with Vent & Storage with Capacity to Fit a 6-Gal Portable Fuel Tank
- Portable 6-Gal Fuel Tank Installed With Fittings" Bow Locker
- Integrated Aluminum Fuel Tank
- Aluminum or Fiberglass Console With Plexiglass Windshield & Grab Rail
- Fiberglass or Aluminum Jockey Consoles
- Customized Aluminum Console and Seats
- Aluminum Jockey Seat
- Leaning Bolster
- Mechanical Steering System
- Hydraulic Steering System
- Standard Rigging From Factory
- SS LED Navigation Light
- All Around LED Anchor Light
- Automatic Bilge Pump
- Master Switch
- Fuel/Water Separator & Canister
- Sunbrella Fabric Boat Cover
- Chock Set
- Lifting Harness
- Electronics Upon Request
- Color Boat Customization

SPECIFICATION

IMPERIAL

METRIC

SPECIFICATION	IMPERIAL	METRIC
OVERALL LENGTH	16'	4.88 M
OVERALL BEAM	7'	2.14 M
INSIDE LENGTH	13' 2"	3.85 M
INSIDE BEAM	3' 6"	1.08 M
TUBE DIAMETER	21"	0.53 M
NUMBER OF CHAMBERS	5	5
PERSON CAPACITY	10	10
WEIGHT	458 LBS	208 KG
WEIGHT WITH BOW LOCKER	479 LBS	217 KG
RECOMMENDED HP	50 HP	37 KW
MAXIMUM HP	70 HP	52.2 KW
SHAFT LENGTH	20"	50.8 CM
RDC DESIGN CATEGORY	C	C
DEADRISE	18°	18°
ALUMINUM HULL THICKNESS	0.190 in	4.78 MM
ALUMINUM TRANSOM THICKNESS	0.190 in	4.78 MM